



Social Housing & Managed Services

Product Catalogue

INTRODUCTION — THE BRITISH HOME

Hardware that keeps Britain's social homes secure, safe and sound.

A note for housing providers, specifiers and managing agents

Around four million households across England call a social home their own – roughly one in six of every front door in the country. From council estates and housing-association blocks to sheltered schemes and supported living, these are the homes that Britain depends upon.

Behind every one of those doors sits a landlord with a duty of care: to keep tenants safe, to keep buildings warm and watertight, and to spend public money well. Since Grenfell, that duty has only sharpened. The **Building Safety Act 2022**, the **Social Housing (Regulation) Act 2023** and the renewed **Decent Homes Standard** have raised the bar on fire safety, building condition and accountability alike.

Yet the budgets have not grown to match. Maintenance teams are asked to turn voids around faster, keep communal doors compliant, and make planned-works programmes stretch further – all without compromising on the standards a tenant has every right to expect.

THE PICTURE ACROSS THE UK

4m+

social homes in England, the largest affordable tenure in the country

1,600+

councils & housing associations responsible for their upkeep

FD30/60

fire-door performance now demanded on flat-entrance & communal doors

£

best value for public funds – the test every specification must pass

“The smallest components – a handle, a hinge, a closer – carry the heaviest daily use of any home.”

Specification-grade ironmongery, built to a social housing budget.

This is precisely where **EUROART** earns its place. We supply the full range of architectural ironmongery a housing programme needs – lever handles, pull handles, door closers, concealed and butt hinges, mortice and digital locks, window fittings and complete door packs – all from a single, dependable source. Every product is engineered in **grade 304 & 316 stainless steel**, tested to British and European standards, and priced so that compliance never becomes a luxury. The same specification-grade hardware that performs on a council estate performs just as hard in a housing-association new-build, a contractor's fit-out or a busy office building.

1

One source, whole building

From the flat entrance to the bin store specify, order and maintain an entire scheme from one catalogue and one supplier.

2

Certified & Fire-rated

Tested to BS EN 1906 and BS EN 1154, CE & UKCA marked, with FD30/FD60 fire-door solutions for communal compliance.

3

Built for British weather

Marine-grade stainless and tested corrosion resistance to BS EN 1670 made to shrug off damp, salt air and hard daily use.

4

10-year guarantee

A 10-year mechanical guarantee on core ranges – fewer call-backs, fewer voids delayed, lower whole-life cost.

5

Honest, budget pricing

Direct, volume-friendly pricing that helps planned-maintenance and voids budgets reach further, without cutting corners.

6

Accessible by design

Lever returns, disabled-WC sets and indicator turns that help schemes meet Approved Document M and inclusive-access duties.

TESTED & APPROVED TO

BS EN 1906

BS EN 1154

BS EN 1670

CE / UKCA

FD30 / FD60

SPECIFIED ACROSS EVERY SECTOR

Social Housing

Councils and ALMOs maintaining tenant, communal and fire-rated doors across large estates.

Housing Associations

Registered providers delivering new-build schemes and planned-maintenance programmes.

Fit-Out Contractors

Main contractors and fit-out builders specifying complete, compliant door sets at pace.

Offices & Commercial

Ideal for office buildings, receptions and high-traffic interiors that demand a clean finish.

The pages that follow

A complete reference of EUROART ironmongery for housing, fit-out and commercial projects – every range, finish and specification, ready for your next programme.




LRS101 - 19mm Safety Lever

LRS101/22 - 22mm Safety Lever



Finish: SSS, PSS

- 8mm Sprung covered rose
- SS Inner rose
- Bolt through fixings and SS screws supplied




LRS102



Finish: SSS, PSS

- 8mm Sprung covered rose
- SS Inner rose
- Bolt through fixings and SS screws supplied

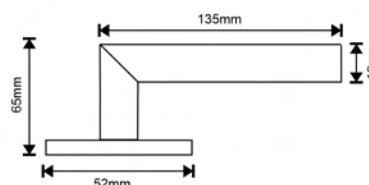


LRS103



Finish: SSS, PSS

- 8mm Sprung covered rose
- SS Inner rose
- Bolt through fixings and SS screws supplied

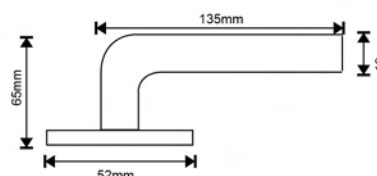


LRS104



Finish: SSS, PSS

- 8mm Sprung covered rose
- SS Inner rose
- Bolt through fixings and SS screws supplied




LRS105



Finish: SSS, PSS

- 8mm Sprung covered rose
- SS Inner rose
- Bolt through fixings and SS screws supplied

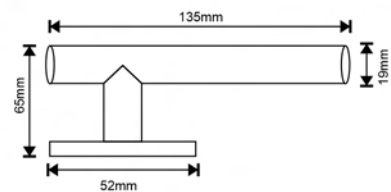


LRS106



Finish: SSS, PSS


- 8mm Sprung covered rose
- SS Inner rose
- Bolt through fixings and SS screws supplied

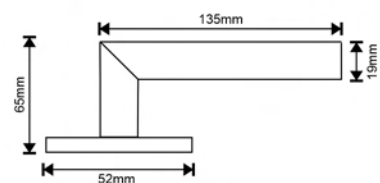

CAPRI DOOR HANDLE




Finish: Dual Tone

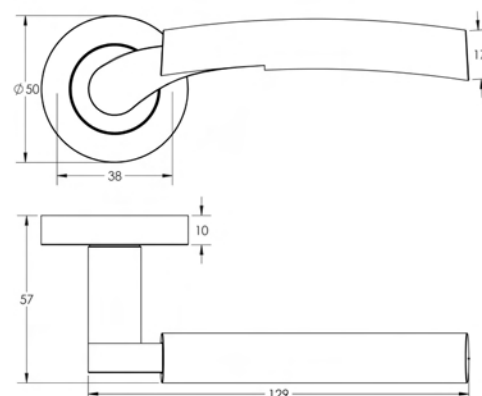

LORENZO DOOR HANDLE




Finish: Dual Tone

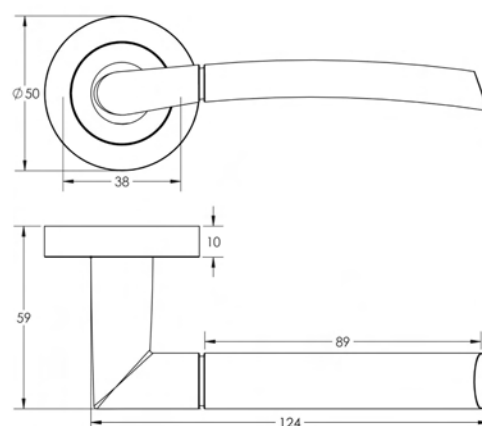

OPAL DOOR HANDLE




Finish: PC, SC

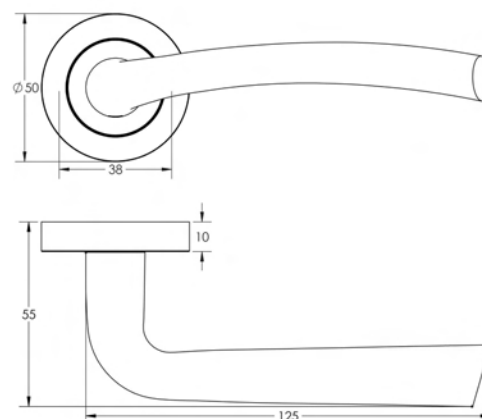

COMET DOOR HANDLE




Finish: PC, SC, SN

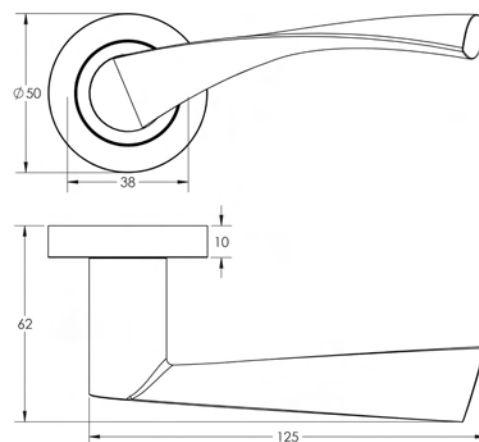

JET DOOR HANDLE




Finish: MB, SB, SN

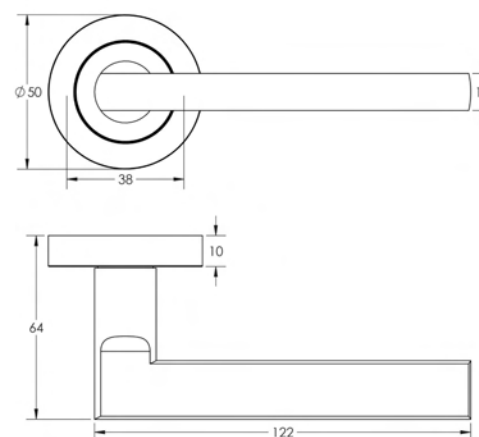

GIO DOOR HANDLE




Finish: PC, SN, SB, AB, MB

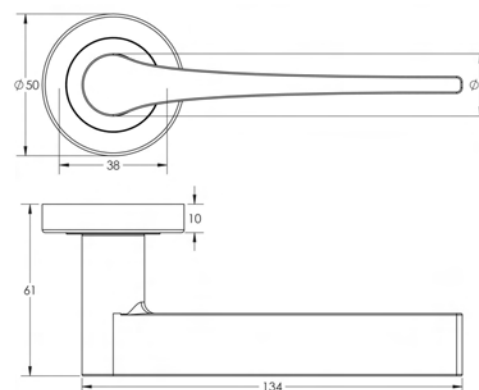

EES001

Euro Profile Escutcheon

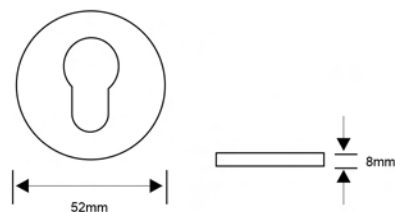

Finish: SSS, PSS


TRS004

Thumbturn and Release
Without Indicator



TRS004i



Thumbturn and Release
With Indicator

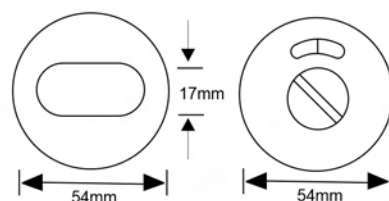

Finish: SSS, PSS

TRS005i


Disabled Thumbturn and
Release With Indicator

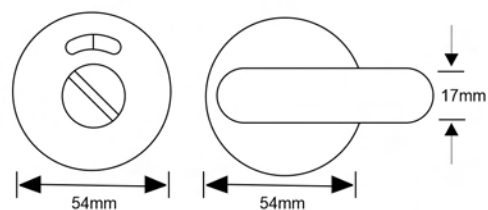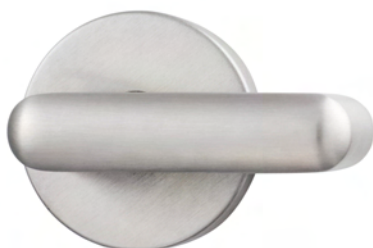

Finish: SSS, PSS

• Available bolt through, back to back pair.


D Pull Handle

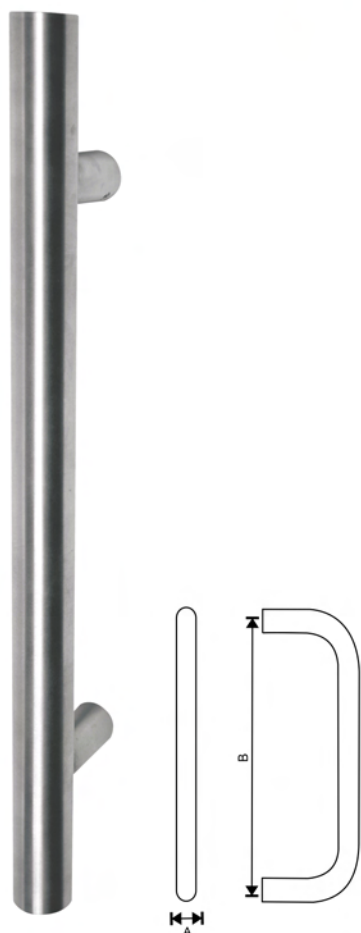

Finish: SSS, PSS

Ref. No.	Size(A x B)
● PHS001	: 16 x 225mm
● PHS002	: 16 x 300mm
● PHS101	: 19 x 150mm
● PHS102	: 19 x 225mm
● PHS103	: 19 x 300mm
● PHS104	: 19 x 400mm
● PHS110	: 22 x 225mm
● PHS111	: 22 x 300mm
● PHS112	: 22 x 400mm
● PHS121	: 25 x 300mm
● PHS122	: 25 x 450mm
● PHS123	: 25 x 600mm
● PHS130	: 32 x 300mm
● PHS131	: 32 x 450mm
● PHS132	: 32 x 600mm
● PHS133	: 32 x 900mm
● PHS134	: 32x1200mm

Mitred Pull Handle

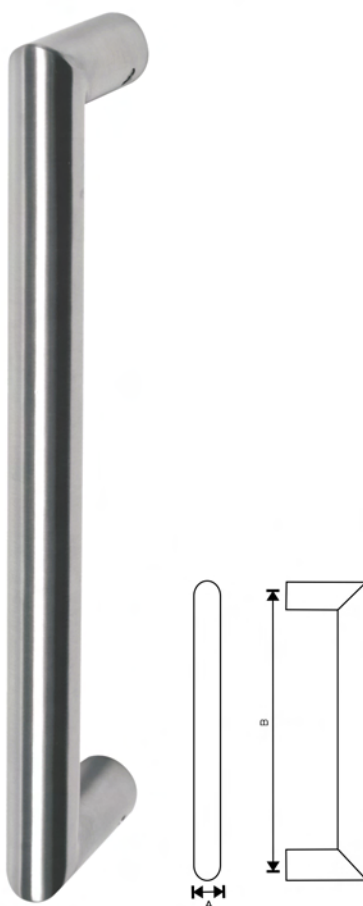

Finish: SSS, PSS

Ref. No.	Size(A x B)
● PHS201	: 19 x 150mm
● PHS202	: 19 x 225mm
● PHS203	: 19 x 300mm
● PHS221	: 25 x 300mm
● PHS222	: 25 x 600mm
● PHS231	: 32 x 600mm
● PHS232	: 32 x 750mm
● PHS233	: 32 x 900mm

'C' Shaped Pull Handle



Finish: SSS, PSS

Ref. No.	Size(A x B)
● PHS421	: 25 x 250mm
● PHS431	: 32 x 350mm

- Suits 35-55mm thick doors
- Suitable for commercial building on glass & timber doors
- Plate size 300 x 75mm • Handle size 225 x 19mm

Pull Handle on Plate



Finish: SSS, PSS

Ref. No.	Size
● PHS270	: 300 x 75mm

Push Handle on Plate



Finish: SSS, PSS

Ref. No.	Size
● PHS275	: 300 x 75mm

Handle on Plate



Finish: SSS, PSS

Ref. No.	Size
● PHS273	: 300 x 75mm

Push Finger Plate



Finish: SSS, PSS

Ref. No.	Size
● PFPS200	: 300 x 75mm

Pull Finger Plate



Finish: SSS, PSS

Ref. No.	Size
● PFPS202	: 300 x 75mm


Finger Plate



Finish: SSS, PSS

Ref. No.	Size
● PFPS203	: 300 x 75mm

Flush Pull Rectangular Corner Concealed

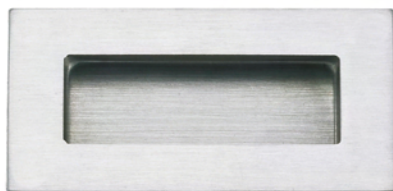

Finish: SSS

Ref. No.	Size
● FPS204	: 100x50x10mm

Flush Pull Circular Concealed



Finish: SSS

Ref. No.	Size
● FPS229	: 28mm
● FPS230	: 50mm
● FPS231	: 65mm

Door Chain



Finish: SSS

Ref. No.	Size
● DCS205	: 123mm

Skirting Door Stop



Finish: SSS

Ref. No.	Size
● DSS205	: 19x53x82mm

Floor Door Stop



Finish: SSS

Ref. No.	Size
● DSS215	: 30x40mm


Round Head Door Stop



Finish: SSS


Ref. No.	Size
● DSS216	: 30x50mm

Door Guards

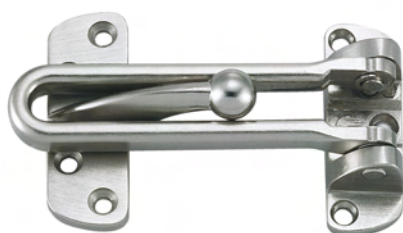

Finish: SSS

Ref. No.
● DGS200

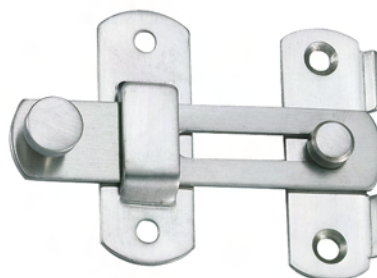

Finish: SSS

Ref. No.	Size
● DGS610	: 100mm
● DGS611	: 75mm

Designer Flush Pull



Ref. No.

- FPS270

Finish: PSS

Hook Lock With Flush Pull Set For Sliding Door



Ref. No.

- FPS265

Finish: PSS

Cup Handle



Finish: SSS

Ref. No. Size

- FPS242 : 76mm

Squash Court Handle or Square Flush Ring Pull



Finish: SSS, PSS

Ref. No. Size

- FPS220 : 90x90mm

Inner Flaps



Finish: SSS, PSS

Ref. No.	Size
● LFS200	: 330x100mm

Letter Plates



Finish: SSS, PSS

Ref. No.	Size	Opening Size
● LPS210	: 305x105mm	220x50mm
● LPS211	: 350x113mm	326x63mm
● LPS212	: 305x100mm	226x54mm
● LPS213	: 282x80mm	185x41mm
● LPS214	: 250x75mm	187x40mm

Cabin Hook



Finish: SSS, PSS

Ref. No.	Size
● CABS200	: 100mm



Finish: SSS, PSS

Ref. No.	Size
● CABS201	: 200mm

Single Hook



Finish: SSS

Ref. No.

- HKS211

Hat & Coat Hook Single



Finish: SSS

Ref. No.

- HKS213

Hat & Coat Hook Double



Finish: SSS

Ref. No.

- HKS214

Hain Rail Brackets



Finish: SSS, PSS

Ref. No. Size

- HRBS202 : 76x50x19mm
- HRBS203 : 85x50x19mm

Concealed Door Closer



Finish: PB, NP, SC

Ref. No.

- DC524
- DC153 radius forend

Rectangular Vision Hole




Ref. No.	Inner Size	Outer Size
VH600	122 x 502mm	222 x 600mm

Square Vision Hole



Ref. No.	Inner Size	Outer Size
Vh625	270 x 270mm	360 x 360mm

Circular Vision Hole



Ref. No.	Inner Size	Outer Size
Vh650	315mm	412mm

Investment Cast Stainless Steel Lever Action Flush Bolt



Ref. No.	Size(A x B)
● FBS201	: 150 x 20mm
● FBS202	: 200 x 20mm
● FBS203	: 300 x 20mm
● FBS204	: 450 x 20mm
● FBS205	: 600 x 20mm
● FBS206	: 750 x 20mm
● FBS207	: 900 x 20mm
● FBS208	: 1200x20mm
● FBS209	: 1500x20mm



SSS



AB



PSS



PVD

Dust Excluding Socket - DESS200



SSS




AB



PSS



PVD



DC1503


Beige



Silver



White





Brown



Black



BS EN 1154

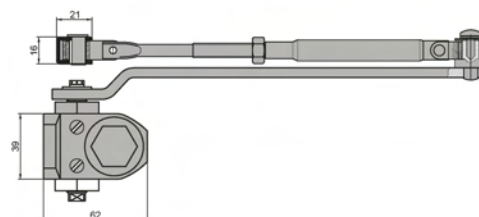
Finish: Silver, Gold, White, Black, Brown, Beige

Product specification

Power size (adjustable by position)

EN3	Yes
Mechanism	Rack and pinion
Adjustable closing speed (2 speeds)	Yes
Maximum door width (mm)	950
Maximum door weight (kg)	60
Angle of operation	Grade 4, 160°
LH and RH doors – universal application	Yes

Note: Parallel arm bracket supplied as extra.

Features

- A budget over head door closer for general applications
- Quick and easy to install
- Non-handed, suitable for standard, parallel arm & frame installation
- Fully control closing cycle
- Hold open arm available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.

BS EN 1154 Classification

Figure 1 Fitting	4	8	3	1	1	3
Figure 66 Fitting	4	8	3	1	1	3


Optional :
Parallel Arm Bracket for Door Closer

DC1024



Without Cover





With Silver Cover



With SSS Cover

Finish: Silver, SBP, MABP, MBL
Cover: Silver, SBP, MABP, MBL, SSS

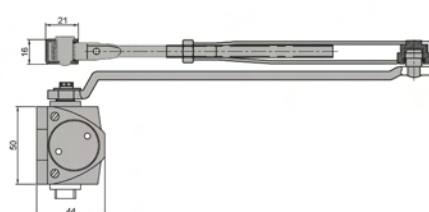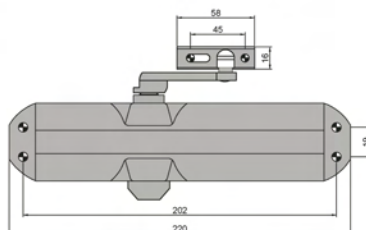

Product specification

Power size (adjustable by position)

EN2	Yes
EN3	Yes
EN4	Yes
Mechanism	Rack and pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Maximum door width (mm)	1100
Maximum door weight (kg)	80
LH and RH doors – universal application	Yes
CE marked	Yes

Features

- Low cost solution for standard doors
- Quick and easy to install
- Non-handed unit
- Inexpensive, proven reliability
- Closing cycle largely unaffected by temperature
- Hold open arm available
- Parallel arm bracket available
- Suitable for 120min fire-rated timber and 240min metal doors
- Tested to Grade 8: 500,000 cycles.



BS EN 1154 Classification

Figure 1 Fitting	4	8	2 4	1	1	4
Figure 66 Fitting	4	8	3	1	1	4




Optional :
Parallel Arm Bracket for Door Closer

EED200 SERIES

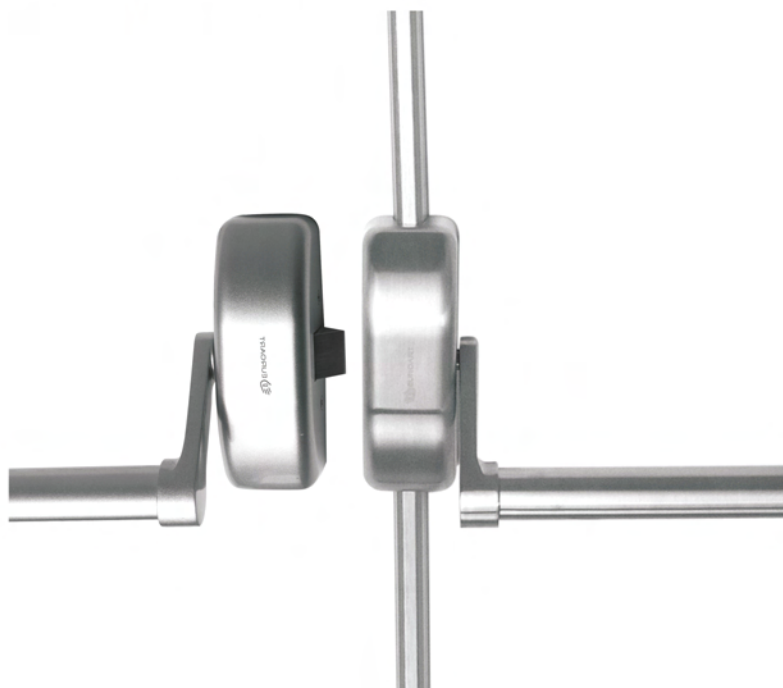

EED201
Single Panic Latch

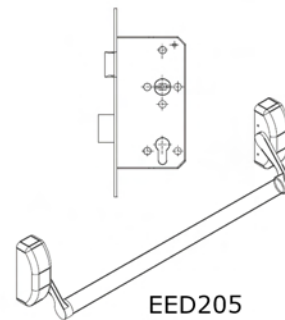


EED205
Mortice Lock



Finish: SSS

Double Door Configurations


Rebated Doors



Non Rebated Doors

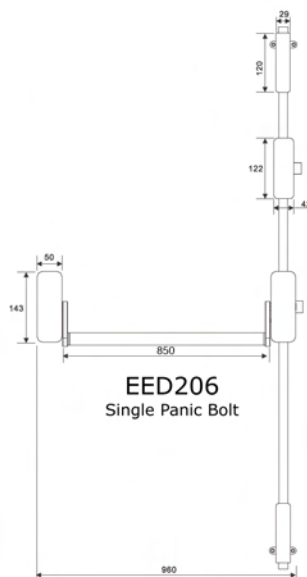

EED206
Single Panic Bolt

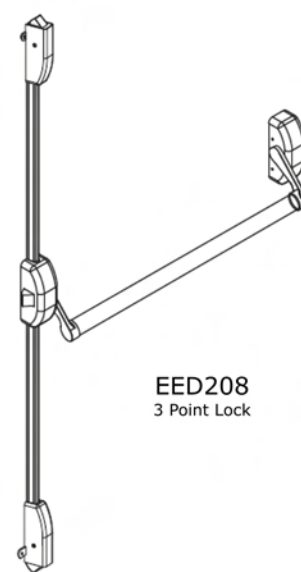

EED208
3 Point Lock


Features

- Elegant and highly functional panic latch
- Operated by downward thrust of the cross bar to give a speedy exit in panic situation
- Available in painted steel and SS grade304
- Anti-thrust mechanism to protect against attack
- Fire rated for use on timber and steel doors

Product specification


- Suitable for doors upto 1440mm wide and 2200mm height
- Supplied with 850mm rod as standard
- Door weight upto 200kg
- Non handed, suitable with out alteration for left or right hand applications
- Top rods available for doors upto 3000mm high

EED300 SERIES

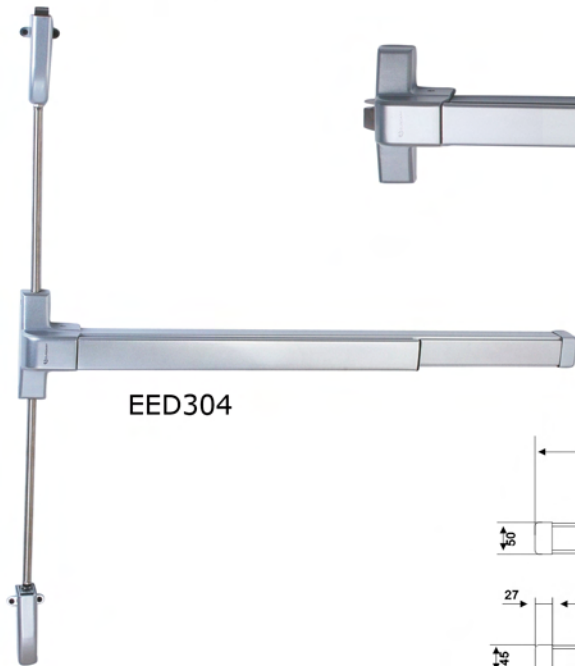


EED301

EED304

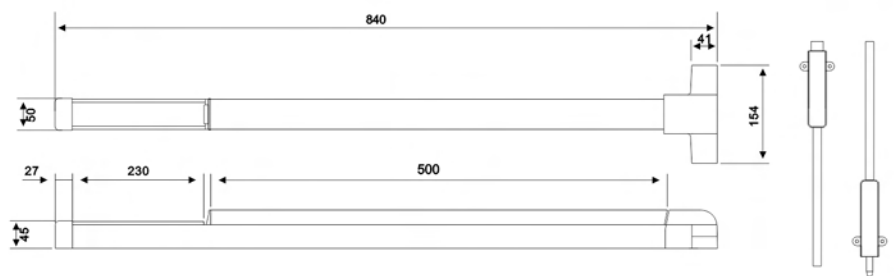


Double Door Configuration

Rebated Doors

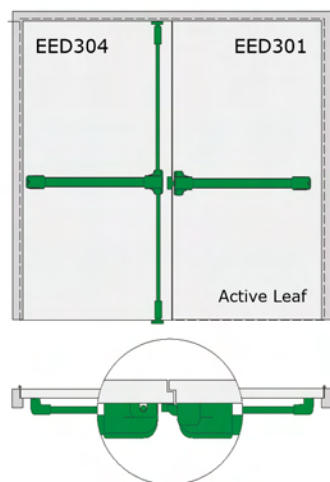

Non Rebated Doors

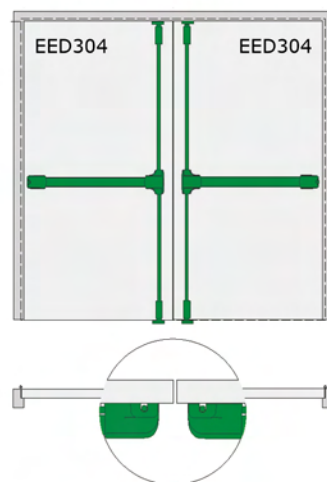

Features

- Available in painted steel and SS grade304
- Optional hold-back available enabling the door to be put into free access
- Fire rated for use on timber and steel doors
- Top rods available for doors upto 3000mm high

Product specification

- Suitable for doors upto 1320mm wide and 2133mm height
- Door weight upto 200kg
- Non handed, suitable with out alteration for left or right hand applications
- Micro switch option available

The Mechanical Digital Locks are designed to offer simple and convenient means of providing moderate security for low to medium pedestrian traffic areas such as storerooms, workshops, plant rooms and offices.



Push Button Easy Code Digital Locks

SBL320.S Satin Chrome

SBL320. B Brass Plated

SBL329. S Satin Chrome - for use with Panic latches

SBL329. B Brass Plated - for use with Panic latches

- SBL320 Easycode has been designed for simple code changes by rotating the pin on the back with a flat screwdriver
- Hold-back function allows unrestricted access
- Single User Code of 4 to 10 digits.
- 40,000 combinations
- Non Handed
- Suitable for Internal or External
- Supplied with Deadlocking Tubular Latch - 60mm Backset
- Suitable for timber or metal doors from 35mm to 65mm



Push Button Digital Locks

SBL300.S Satin Chrome


SBL300. B Brass Plated

SBL310.S Satin Chrome - With Hold Back

SBL310. B Brass Plated - With Hold Back

- Single User Code of 4 to 10 digits.
- 40,000 combinations
- Non Handed
- Suitable for Internal or External
- Supplied with Deadlocking Tubular Latch 60mm Backset
- Suitable for timber or metal doors from 35mm to 65mm

EA 195 Access Control Digital Keypad

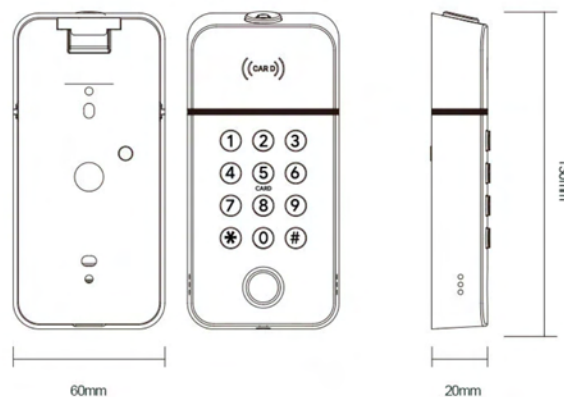


AAC01 - Access Control Kit

Easy to install Stand Alone kit consisting of

- 12v DC 1 amp Power Supply Unit
- Keypad
- Narrow Exit Switch
- Rim Electric Strike with Mortice Plate


**ABGUI-DP
Emergency
Re-settable Call
Point**

- Double Pole


**AEB1NR
White Plastic
Exit Switch
c/w surface box**

**AEB2
Flush Stainless
Steel Exit Button
with normal open /
closed contacts**

**AEB6 Flush
Stainless Steel
Exit Dome
Buttons**

AAC02 - Access Control Kit

Easy to install Stand Alone kit consisting of

- 12v DC 1 amp Power Supply Unit
- Keypad
- Narrow Exit Switch
- Slim Line Electric Lock 12/24V DC Unmonitored


Slim Line Electro Magnet


- AEM10001 - Single Magnet 12/24v dc c/w Safety Bolts Unmonitored
- AEM10002 - Single Magnet 12/24v dc c/w Safety Bolts Monitored
- AEM10003 - Double Magnet 12/24v dc c/w Safety Bolts Unmonitored
- AEM10004 - Double Magnet 12/24v dc c/w Safety Bolts Monitored


**Slim Line Z & L Bracket for Electro
Magnet**

- AEMBR008 - L Bracket for Outward Opening Doors
- AEMBR089F Z & L Bracket for Inward Opening Doors


**Stainless Steel Exit Buttons with
Disability Logo**

AEB10 - Narrow Stainless Steel Button
AEB14 - 4" Round All Active Switch

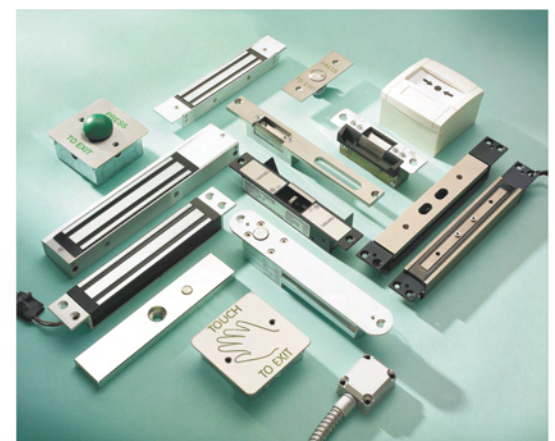


APX03 Internal / External Keypad

- Standalone Keypad
- Surface Mounted
- Proximity Reader
- 12v DC
- 5 Proximity Fobs


APX11 Internal / External Keypad -

- Stand Alone
- Surface Mounted
- 12DC


Power Supply Unit for Access Control

- | | |
|---------|----------------------------------|
| FB42 | 12v DC 1.0 amp Power Supply Unit |
| FB42/2A | 12v DC 2.0 amp Power Supply Unit |
| FB43 | 12v DC 3.0 amp Power Supply Unit |


ABW-K42 Internal / External Keypad

- Surface Mounted
- 2 code keypad
- 12 / 24v AC / DC
- Pin & Peg Code Selection


ACT5 Internal / External Keypad -

- Surface or Flush Mounted
- 12 / 24v AC / DC
- 10 User Codes
- IP67 Rated

Rim Electric Strike with Mortice Plate

For use with Door Entry or Access Control Systems

Fail Locked or Fail Unlocked

12vAC / DC

Mortice Strike complete with Rim Plate



ADCN203+S Rim / Mortice Release 12 AC/DC Fail Locked

ADCN203-412G+S Rim / Mortice Release 12 DC Fail Locked

ADCN203-512G+S Rim / Mortice Release 12 DC Fail Unlocked

ADCF206G Surface Case for Inward Opening


Easykit Audio Door Entry Kit

- Available as 2, 3, 4, 5 & 6 way to order
- Power Supply Unit included
- Handset to suit each way
- Surface Mounted




- F66261/SB 1 way
- F66262/SB 2 way
- F66263/SB 3 way
- F66264/SB 4 way
- F66265/SB 5 way
- F66266/SB 6 way

DUMMY LEVER

Decorative Dummy Lever



Finish: Chrome Polished

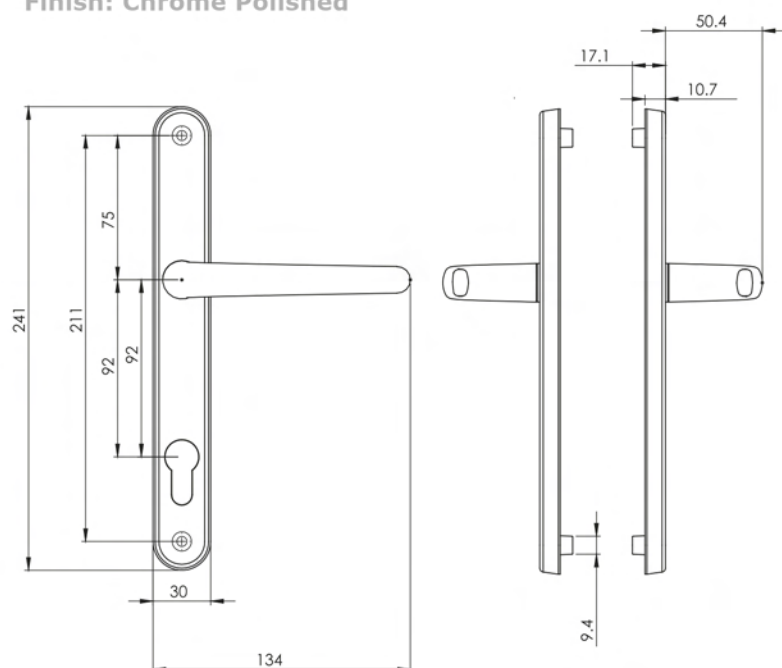

Material

High Quality Zinc Casting or
Aluminium Alloy Backplate

Features

- Stylish solid handle with a softly rounded back plate.
- Sculpted ergonomic grip with a smooth action.
- Simple and quick installation, no need to fit springs or lever.
- Supplied with screw and spindle pack to suit 44mm or 70mm profiles.
- Suitable for PVCu, composite and timber doors.



Polished Brass



White




Matt Black

DECORATIVE DUMMY LEVER LEVER



Finish: Chrome Polished

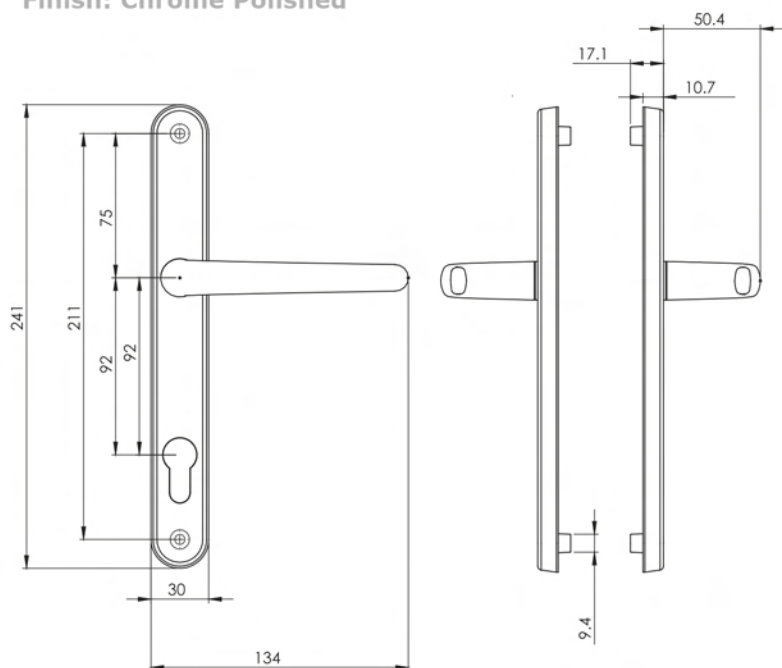

Material

High Quality Zinc Casting or
Aluminium Alloy Backplate

Features

- Stylish solid handle with a softly rounded back plate.
- Sculpted ergonomic grip with a smooth action.
- Simple and quick installation, no need to fit springs or lever.
- Supplied with screw and spindle pack to suit 44mm or 70mm profiles.
- Suitable for PVCu, composite and timber doors.



Polished Brass



White




Matt Black

DECORATIVE INLINE LEVER DOOR HANDLE



Finish: Chrome Brass

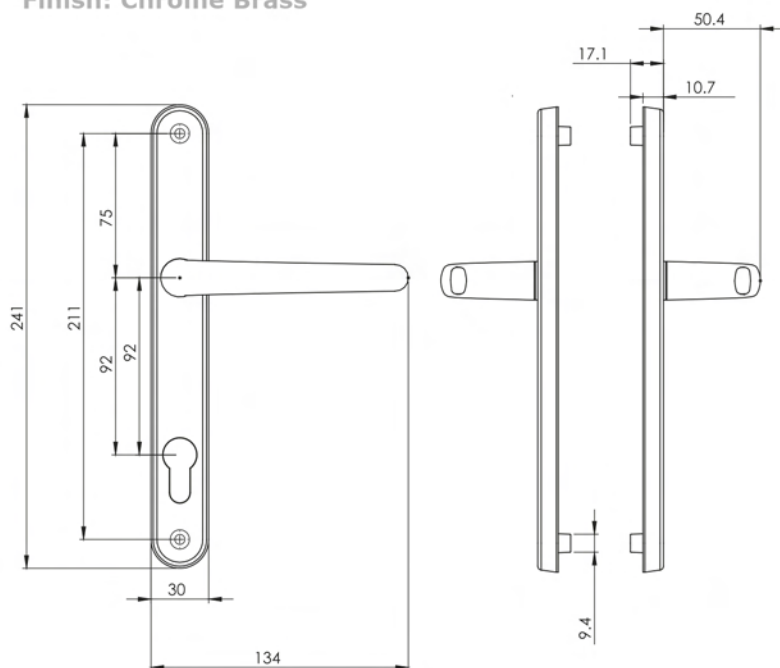

Material

High Quality Zinc Casting or
Aluminium Alloy Backplate

Features

- Stylish solid handle with a softly rounded back plate.
- Sculpted ergonomic grip with a smooth action.
- Simple and quick installation, no need to fit springs or lever.
- Supplied with screw and spindle pack to suit 44mm or 70mm profiles.
- Suitable for PVCu, composite and timber doors.



Polished Chrome



White



Satin Chrome




Matt Black

DECORATIVE INLINE LEVER PAD DOOR HANDLE



Finish: Satin Chrome

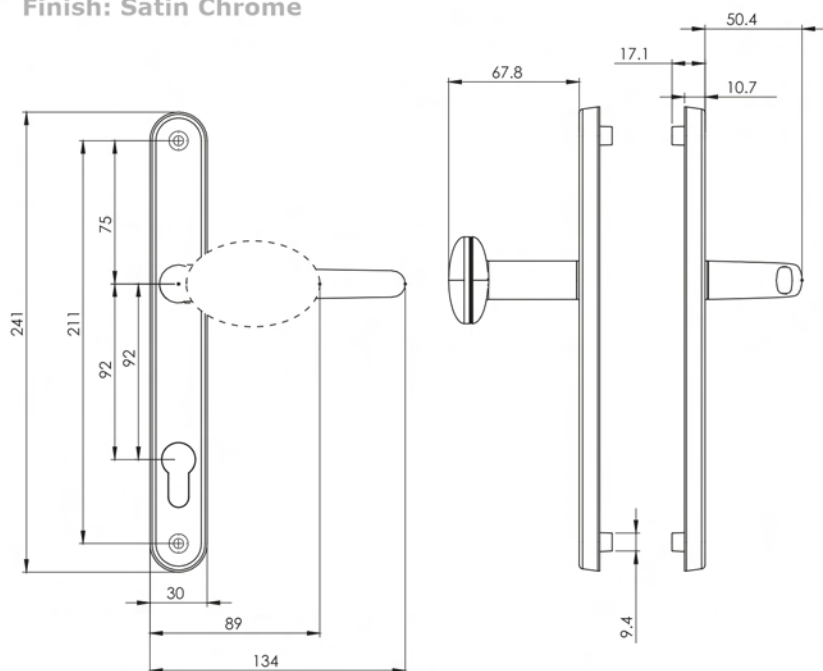

Material


High Quality Zinc Casting or
Aluminium Alloy Backplate

Features

- Stylish solid handle with a softly rounded back plate.
- Sculpted ergonomic grip with a smooth action.
- Simple and quick installation, no need to fit springs or lever.
- Supplied with screw and spindle pack to suit 44mm or 70mm profiles.
- Suitable for PVCu, composite and timber doors.



Polished Chrome



Polished Brass



White




Matt Black

DECORATIVE OFFSET LEVER PAD DOOR HANDLE



Finish: Polished Brass

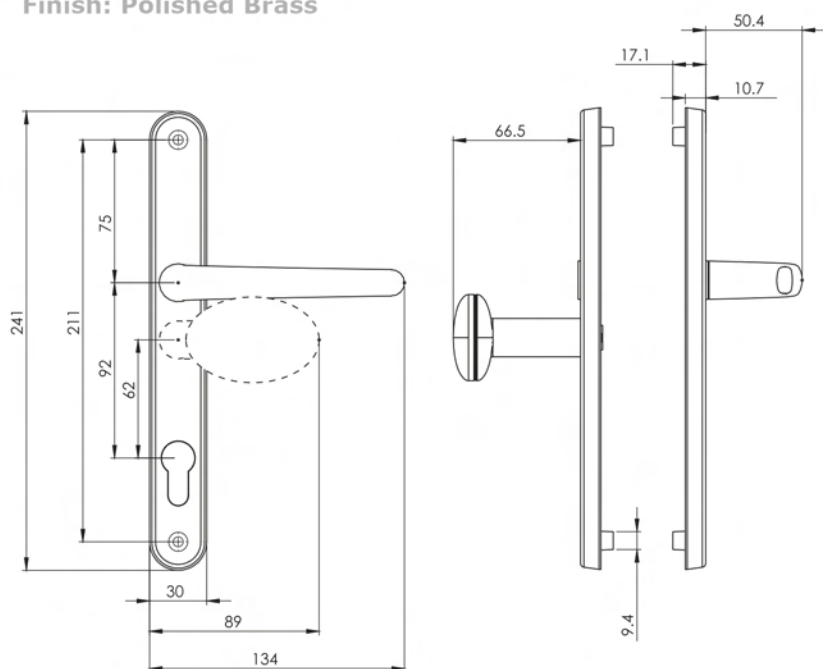

Material

High Quality Zinc Casting or
Aluminium Alloy Backplate

Features

- Stylish solid handle with a softly rounded back plate.
- Sculpted ergonomic grip with a smooth action.
- Simple and quick installation, no need to fit springs or lever.
- Supplied with screw and spindle pack to suit 44mm or 70mm profiles.
- Suitable for PVCu, composite and timber doors.



Polished Chrome



Satin Chrome




White



Matt Black


AR7550

Lever handle set on backplate

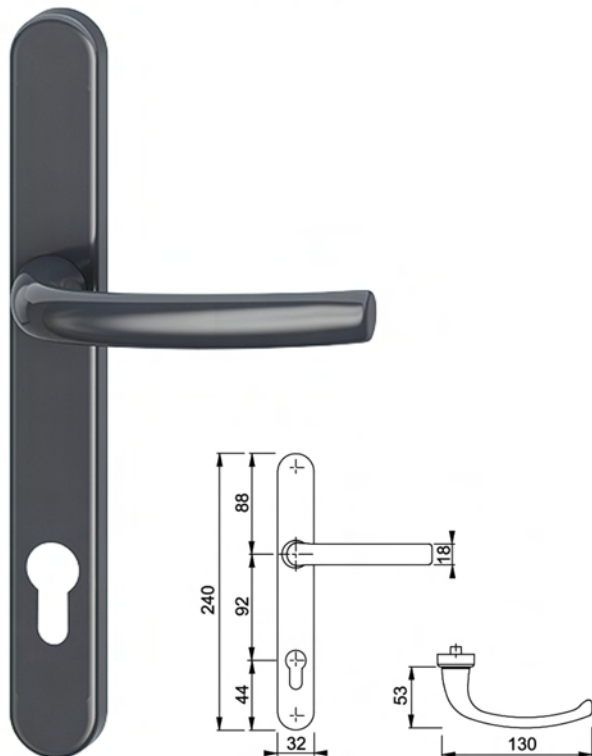


3626463

Aluminium handle set on narrow backplate

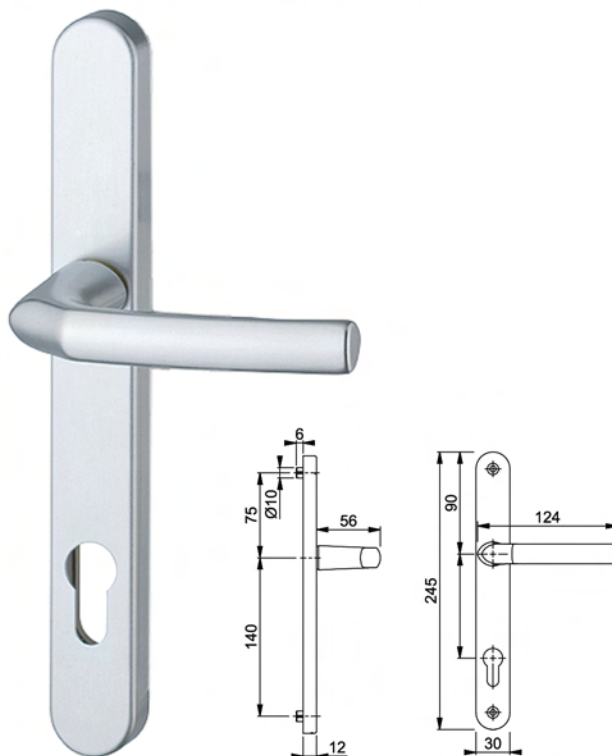

3690721

Aluminium knob (pad) handle set

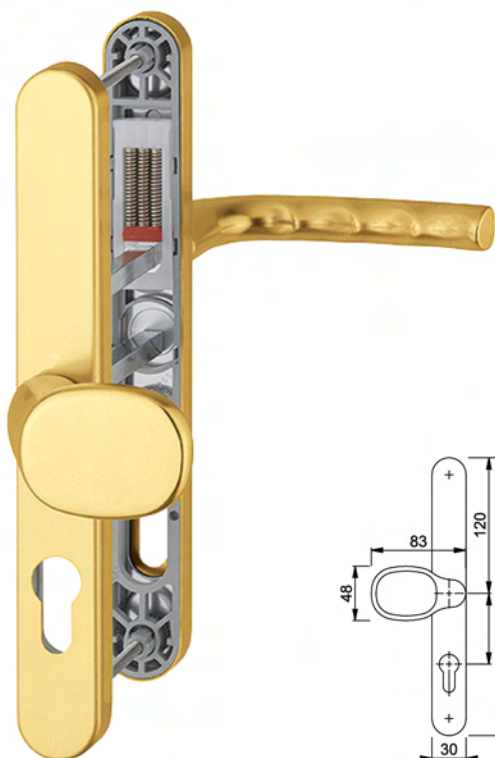


Material


Aluminium or Zinc

Features

- Function : Lever handle set for residential applications.
- Spring : Integrated.
- Bearing : Fixed.
- Door Thickness : 44mm
- Spindle Size : 8mm Solid Spindle.
- Key Hole Distance : 92mm

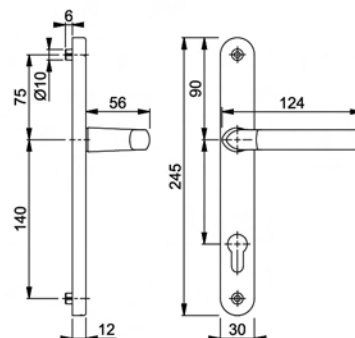


CLASSIC PVCU DOOR HINGE

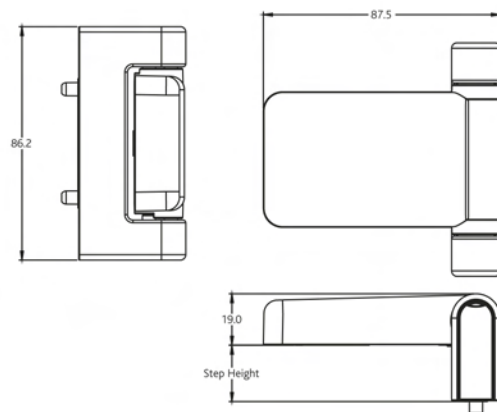


Finishes: Polished Brass, Polished Chrome, Bronze, Graphite, Antique Black, Matt Black, Pewter, Satin, White

NEXUS DOOR HINGE-01

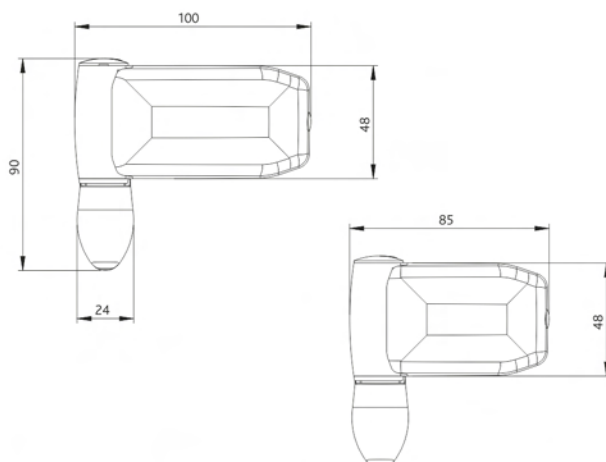

Finishes: Polished Brass, Polished Chrome, Bronze, Graphite, Antique Grey, White

NEXUS DOOR HINGE-02

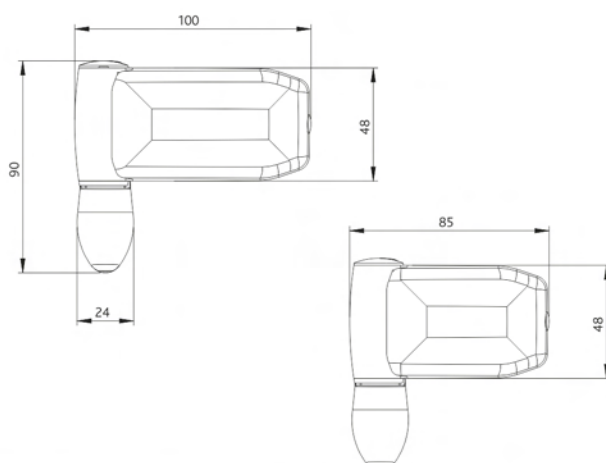

Finishes: Polished Brass, Polished Chrome, Bronze, Graphite, Antique Black, Matt Black, Pewter, Satin, White

2 Hook 2 Roller Euro Cylinder Door Lock



Features


- Available as 28mm, 30mm and 35mm Backsets, with 16mm face bar.
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements.
- Central brass deadbolt throws 22mm to prevent unauthorised entry.
- Twin high security hooks for anti-separation resistance - 10mm engagement into keeps.
- Split spindle for lever/pad applications - choice of length available.
- Hook deadlocked in the fully thrown position.
- Precision adjustable rollers for enhanced performance and weather sealing.
- Continuous keep available.




Keeps



Shootbolt (Optional)

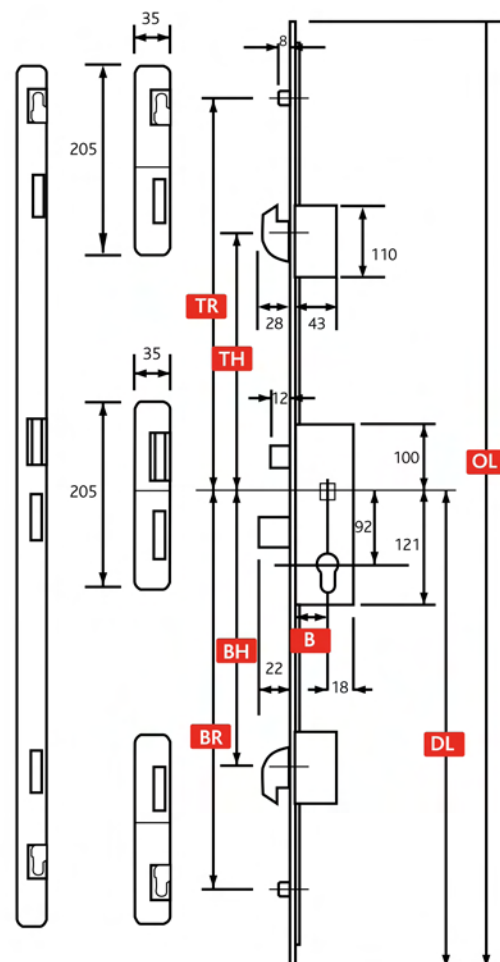

3 Hook 2 Roller Euro Cylinder Door Lock

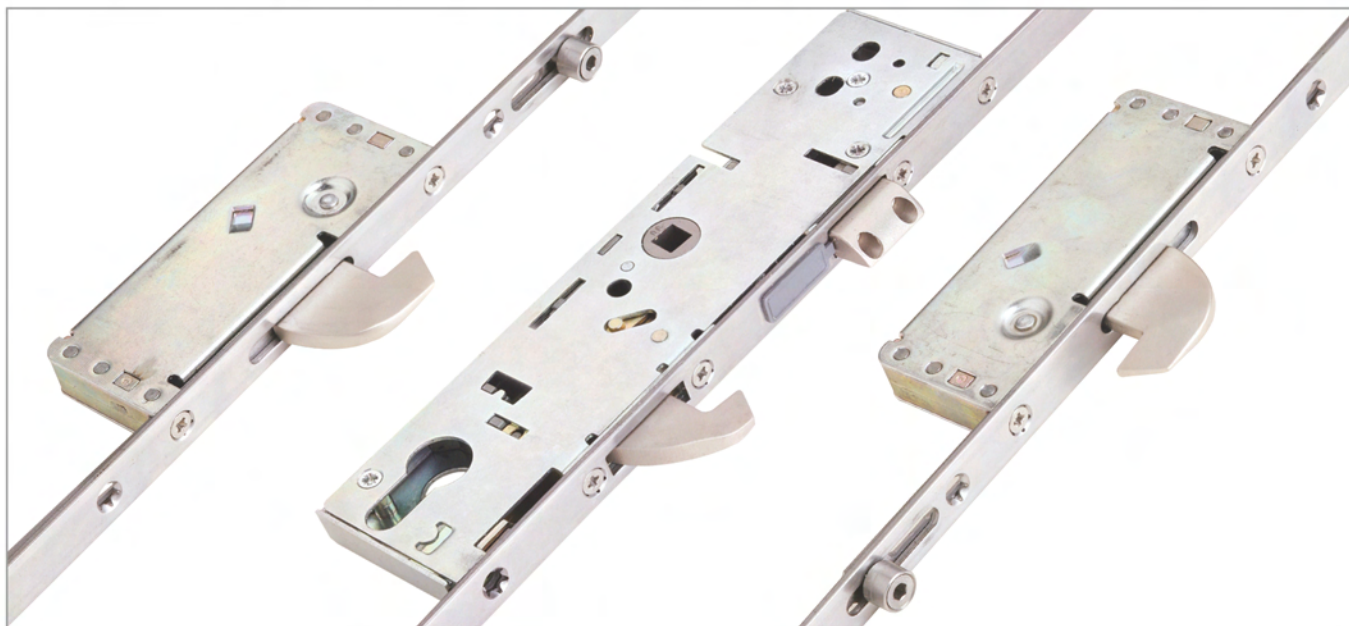

Features



- Available as 28mm, 30mm and 35mm Backsets, with 16mm face bar.
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements.
- Split spindle for lever/pad applications - choice of length available.
- Triple high security hooks for anti-separation resistance - 10mm engagement into keeps.
- Bi-directional throw of locking features - enhanced anti-jemmy feature.
- Hook deadlocked in the fully thrown position.
- Precision adjustable rollers for enhanced performance and weather sealing.
- Continuous keep available.




Keeps



Shootbolt (Optional)

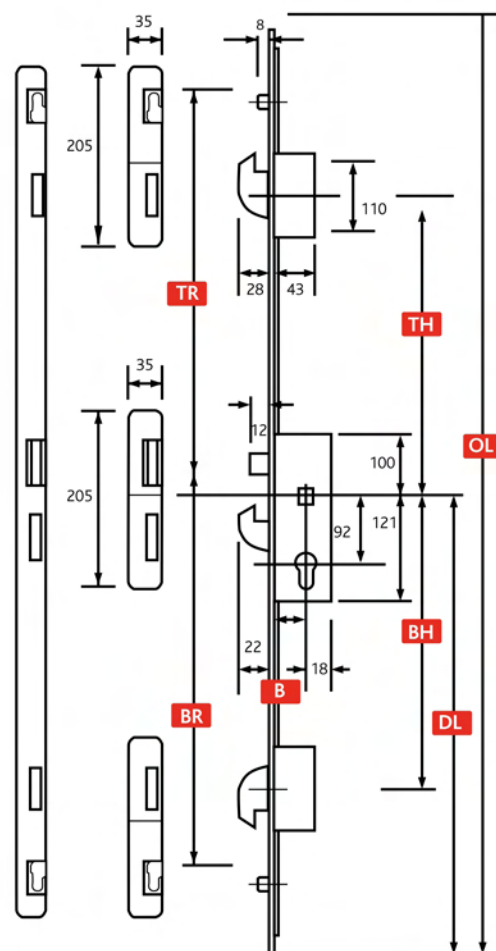

2 Hook Euro Cylinder Door Lock

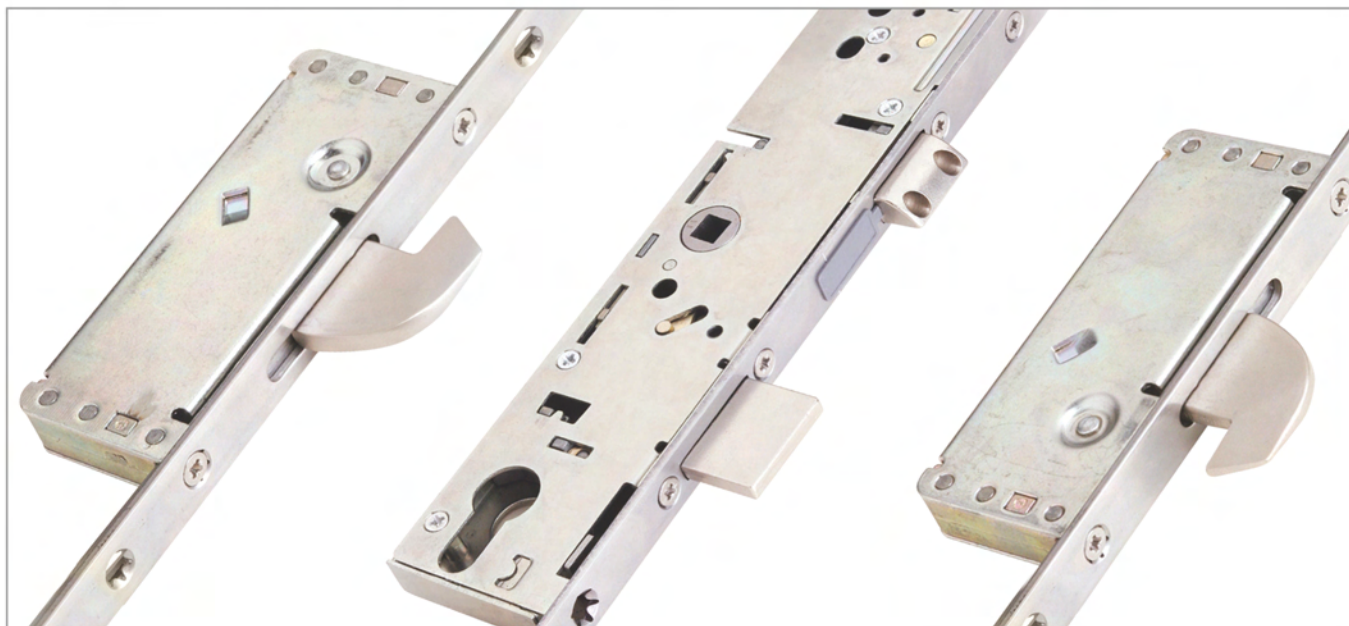

Features


- Available as 35mm and 45mm Backsets with 16mm and 20mm face bars.
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements.
- Snib facility as standard on all locks.
- Central brass deadbolt throws 22mm to prevent unauthorised entry.
- Twin high security hooks for anti-separation resistance - 10mm (maximum) engagement into keeps.
- Hook deadlocked in the fully thrown position.
- Precision adjustable rollers for enhanced performance and weather sealing.
- Continuous keep available.



Keeps



Shotbolt (Optional)

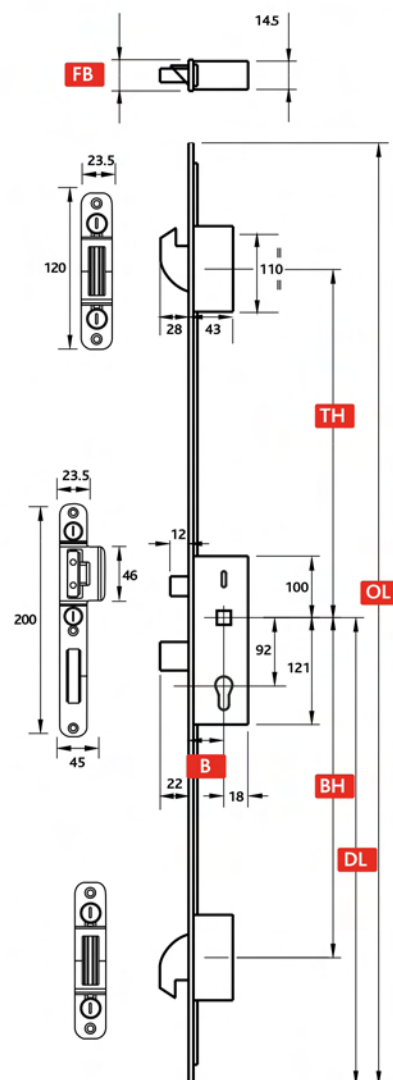


Passive Euro Cylinder Door Lock



Features

- Available as 30mm, 35mm and 45mm Backsets, with 16mm face bar.
- Non-handed mechanism to minimise stock requirements.
- Accepts standard 92mm unsprung handles and euro profile cylinders (operates with all BS and DIN specification cylinders and most other types of cylinder)
- Adjustable steel keeps giving $\pm 2.0\text{mm}$
- Easy-fit packer system for alternative profiles.
- Shootbolt engagement for additional security.

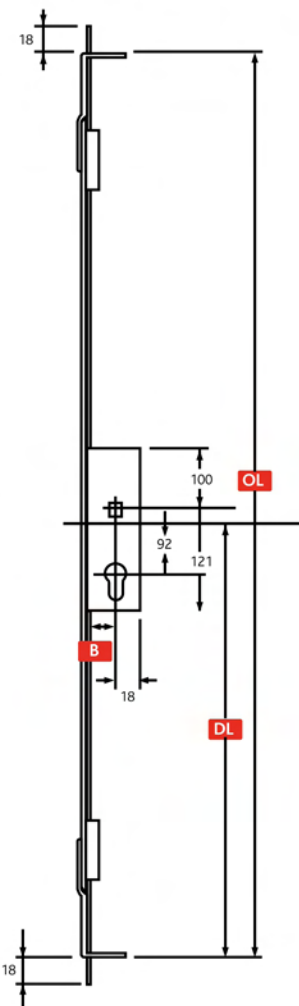

Shoot Keeps




Shootbolt

Maxim Inline Window Handle



Features

- Modern stylish espagnolette handle.
- Firm ergonomic design grip.
- Distinctive 'teardrop' feature and recessed button.
- Large button for ease of operation.
- Positive stop (offset).
- Locks automatically on closing - deadlocked for enhanced security.
- Locking and non-locking versions (optional green button).
- Optional inserts to convert locking handles to non-locking.
- Distinctive 'teardrop' feature and recessed button.
- Offset and inline options.
- Various spindle sizes.

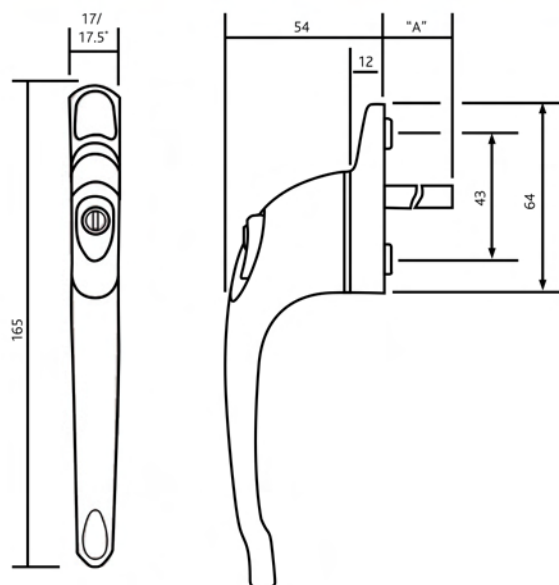

White



Polished
Gold



Polished
Chrome



Satin
Chrome




Matt
Black

Maxim Inline Window Handle



Features

- Modern stylish espagnolette handle.
- Firm ergonomic design grip.
- Distinctive 'teardrop' feature and recessed button.
- Large button for ease of operation.
- Positive stop (offset).
- Locks automatically on closing - deadlocked for enhanced security.
- Locking and non-locking versions (optional green button).
- Optional inserts to convert locking handles to non-locking.
- Distinctive 'teardrop' feature and recessed button.
- Offset and inline options.
- Various spindle sizes.

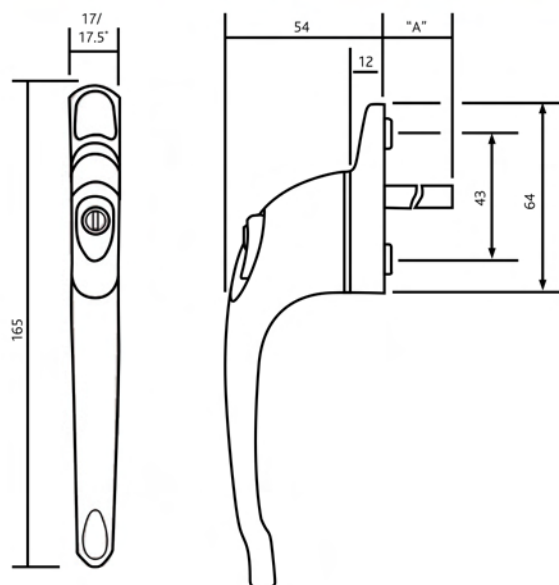

White



Polished
Gold



Polished
Chrome



Satin
Chrome




Matt
Black

Maxim Offset Window Handle



Features

- Modern stylish espagnolette handle.
- Firm ergonomic design grip.
- Distinctive 'teardrop' feature and recessed button.
- Large button for ease of operation.
- Positive stop (offset).
- Locks automatically on closing - deadlocked for enhanced security.
- Locking and non-locking versions (optional green button).
- Optional inserts to convert locking handles to non-locking.
- Distinctive 'teardrop' feature and recessed button.
- Offset and inline options.
- Various spindle sizes.

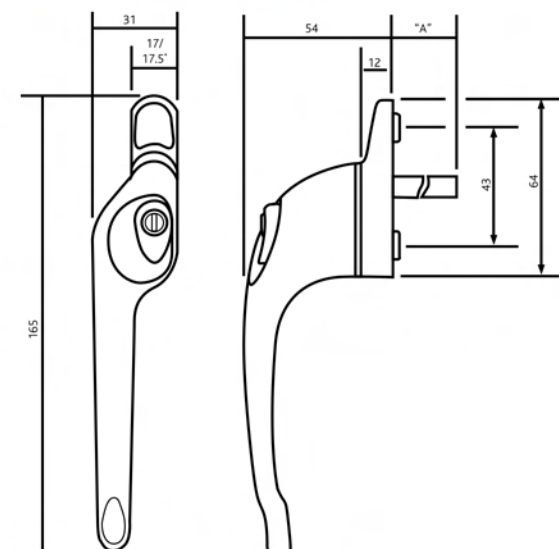

White



Polished
Gold



Polished
Chrome



Satin
Chrome




Matt
Black

Universal Maxim Inline Window Handle



Features

- Modern stylish espagnolette handle.
- Firm ergonomic design grip.
- Distinctive 'teardrop' feature and recessed button.
- Large button for ease of operation.
- 5 spindle lengths supplied to suit most casement window: 9mm, 15mm, 30mm, 43mm and 55mm.
- Positive stop (offset).
- Locks automatically on closing - deadlocked for enhanced security.
- Key locking handle.
- Optional inserts to convert locking handles to non-locking.

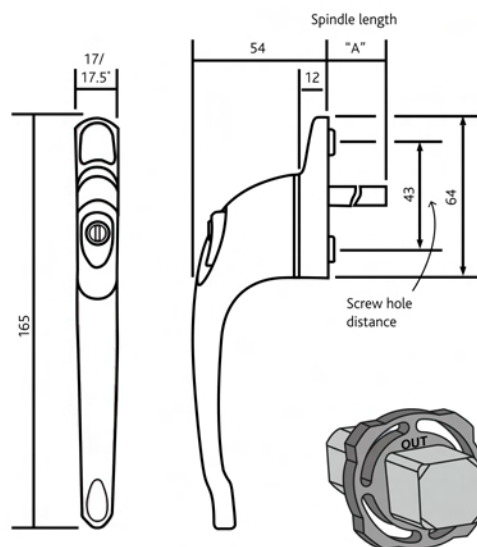


White



Polished
Gold



Polished
Chrome

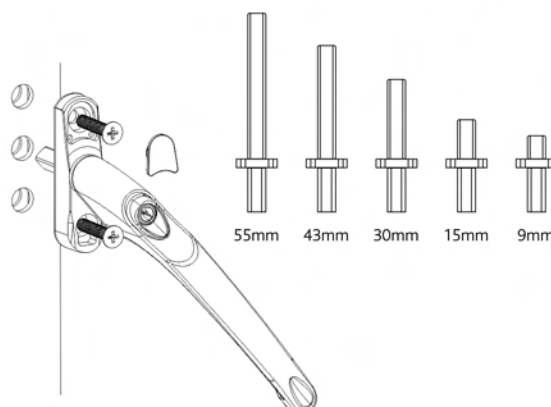

Standard Friction Stay




Hingeguard Elite
(sold separately)


Features

- High quality Stainless Steel for long life performance in accordance with BS EN 10088-2:2014.
- Durable and reliable design.
- Available in Stainless Steel 430 or Austenitic Stainless Steel 304.
- Pointed arm and nylon end cap provide gasket compression and smooth engagement.
- Friction adjustment cam.
- All rivets are solid.
- Anthracite grey end cap and nylon components enhances the look of the stay in a window.
- 2 stack heights – 13mm and 16.5mm.
- Available in Top Hung (8" - 24") and Side Hung (12", 16").

Top Hung

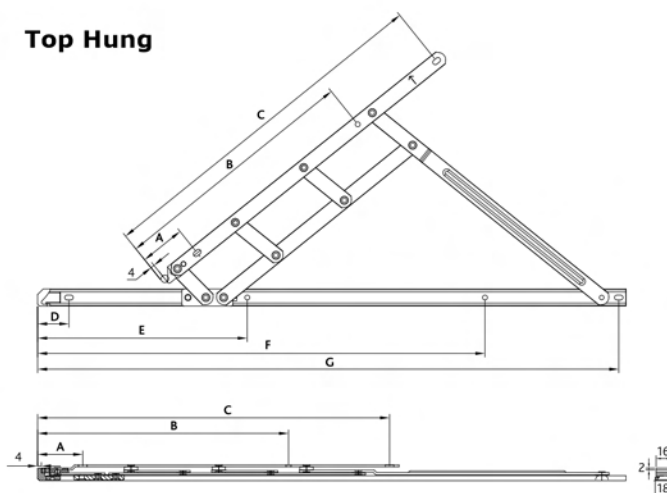

Side Hung

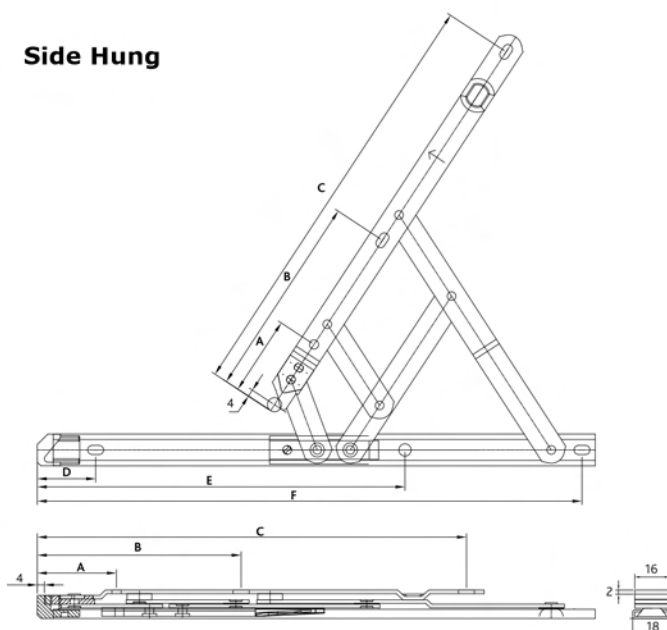



Egress Friction Hinge




Hingeguard Elite
(sold separately)


Features

- High quality Stainless Steel for long lasting performance.
- Durable and reliable design.
- Available in Stainless Steel 430 or Austenitic Stainless Steel 304.
- Egress friction hinges are ideal for first floor window applications when used in conjunction with non locking operating handles.
- Friction adjustment cam.
- Capable of meeting the requirements of BS 6375-1 and 2.

Technical Drawing

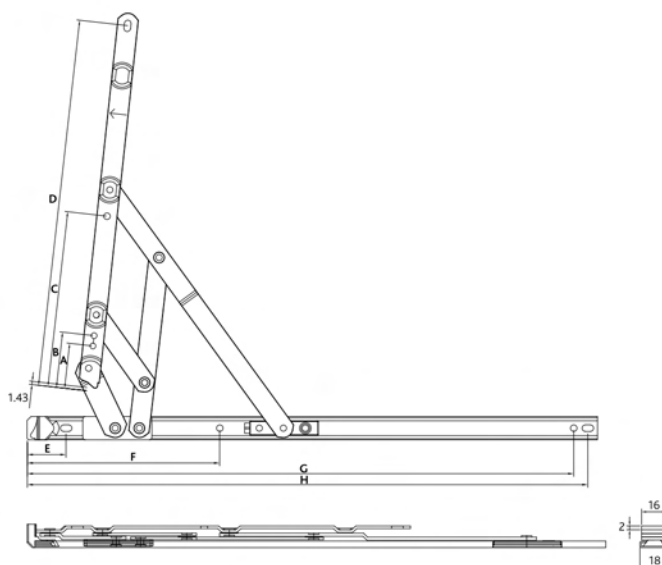


Flash Base Hinge

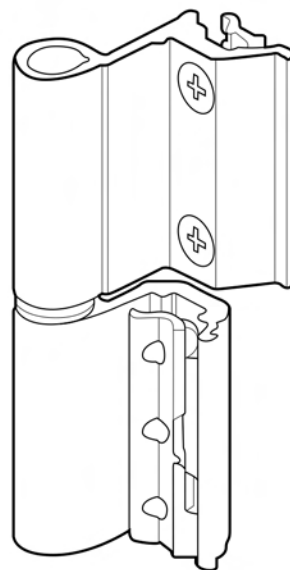

Features

- Two-handed hinge for inward opening aluminium casement windows with central gasket seal.
- Supplied pre-assembled to enable fast installation, but handing can be changed with the hinge pin.
- Special shape of fixing plate fitted to the sash guarantees the firmest possible attachment of the hinge to the profile.
- Quick to fit on both the sash and frame.
- Design of the hinge and the plate enables swift and simple application to an already assembled fixture and accurate positioning of the hinge when fixing.
- Solutions available to suit most aluminium profiles.

Technical Drawing

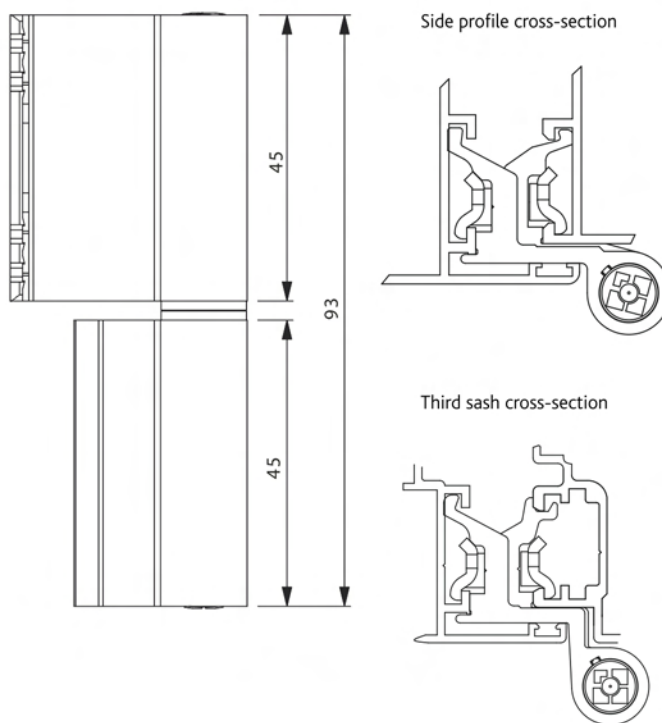



Nico Standard Hinge – 13mm



Features

- Stainless Steel riveted nose cap for strength and reliability.
- 3 stage counterbore process for improved resistance to wear.
- Glass reinforced nylon slide eliminating breaking and wear.
- 4.8mm Stainless Steel rivets for improved load carrying.
- Stainless construction for exceptional corrosion resistance.
- Brass adjustment screw for adjustable friction.

Nico Standard Hinge – 17mm

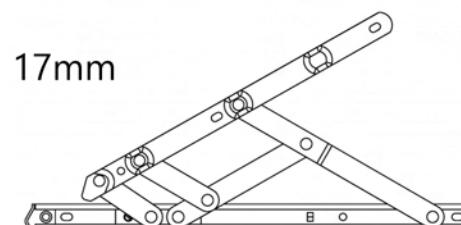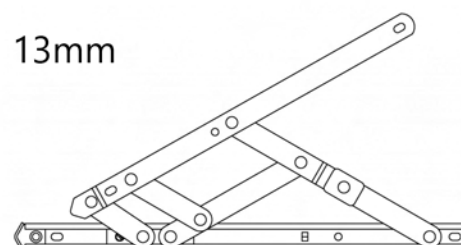

Vent Type - Side Hung

Size	200mm (8")	250mm (10")	300mm (12")	400mm (16")
Max. Vent Height	350mm	450mm	600mm	700mm
Max. Vent Weight	12 Kg.	16 Kg.	22 Kg.	26 Kg.
Opening Angle	60°	65°	60°	60°

Vent Type - Top Hung


Size	200mm (8")	250mm (10")	300mm (12")	400mm (16")	500mm (20")	600mm (24")
Max. Vent Height	350mm	450mm	550mm	750mm	1000mm	1300mm
Max. Vent Weight	12 Kg.	16 Kg.	22 Kg.	26 Kg.	28 Kg.	40 Kg.
Opening Angle	60°	65°	60°	60°	52°	38°

Egress friction hinge



Features

- No awkward buttons or catches required for easy clean.
- Automatically resets on closing.
- Safe and simple for fast escape.
- Stainless Steel riveted nose cap for strength and reliability.
- 3 stage counterbore process for improved resistance to wear.
- Glass reinforced nylon slide eliminating breaking and wear.
- 4.8mm Stainless Steel rivets for improved load carrying.
- Stainless construction for exceptional corrosion resistance.
- Brass adjustment screw for adjustable friction.

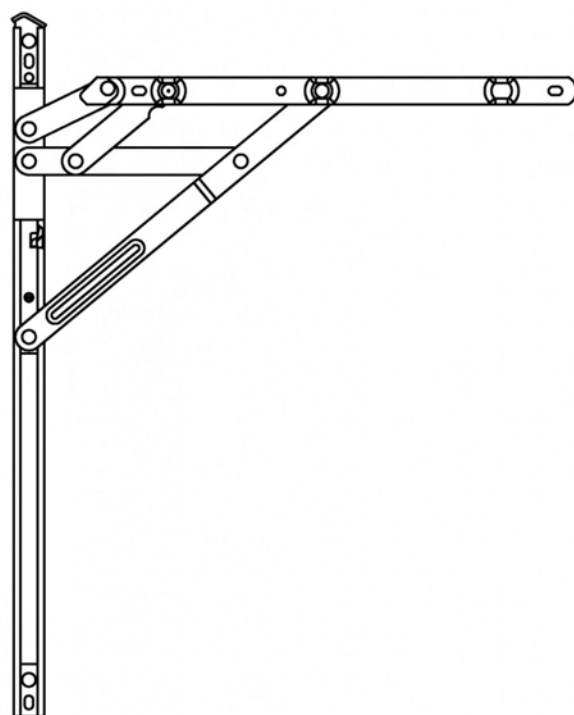

Egress Easy Clean Friction Hinges

Size	300mm (12")	400mm (16")	300mm (12")	400mm (16")
Max. Vent Height	600mm	700mm	600mm	700mm
Max. Vent Weight	22 Kg.	26 Kg.	22 Kg.	26 Kg.
Opening Angle	85°	90°	85°	90°

Restricted Egress Friction Hinge




Features

- Child resistant catch release for full opening, with automatic reset on closure.
- Unique geometry provides greater clear opening for escape.
- Stainless Steel riveted nose cap gives strength and reliability.
- 3 stage counterbore process improves resistance to wear.
- Glass reinforced nylon slide eliminates breaking and wear.
- 4.8mm Stainless Steel rivets for improved load carrying.
- Stainless construction for exceptional corrosion resistance.
- Brass adjustment screw for adjustable friction.
- Brass adjustment screw for adjustable friction.




Vent Type - Side Hung

Size	300mm (12")	400mm (16")
Max. Vent Width	600mm	700mm
Max. Vent Height	1300mm	1300mm
Max. Vent Weight	22 Kg.	26 Kg.

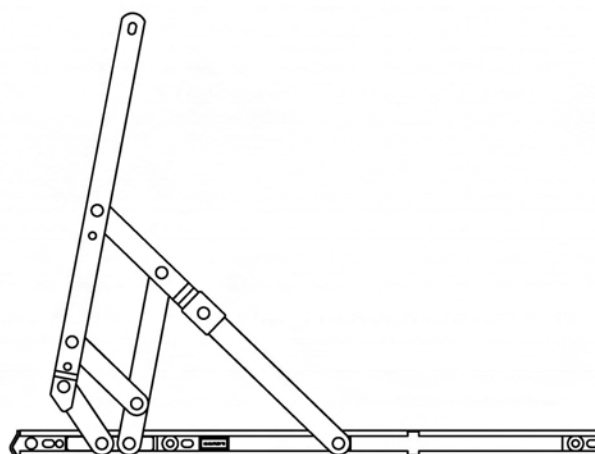

JOVIAN

Flate Lever on Backplate(Heavy)

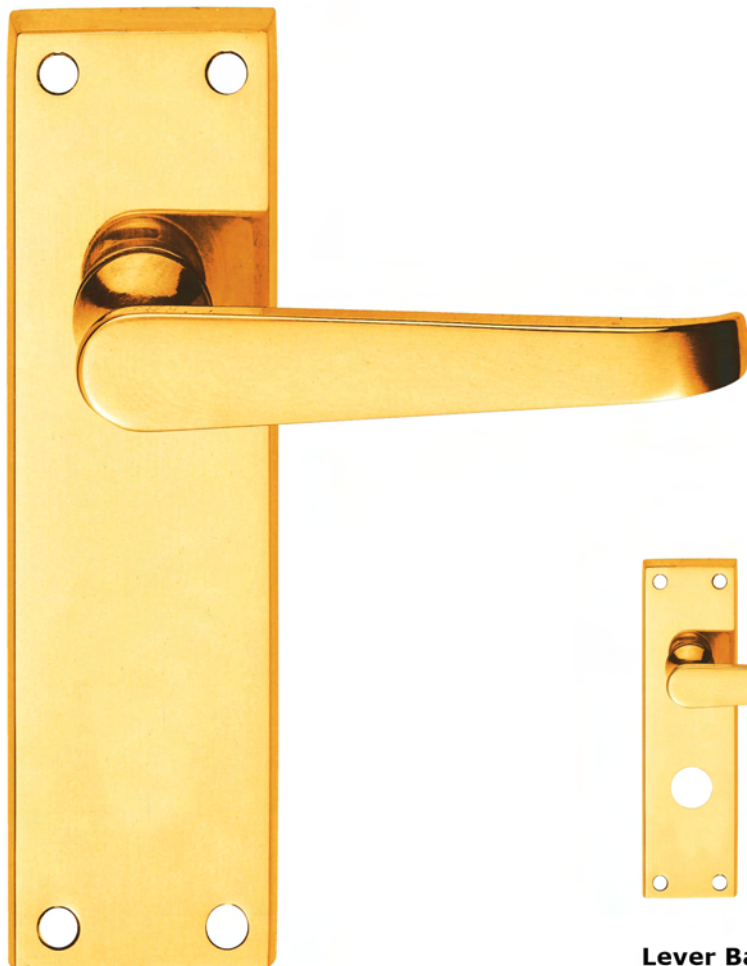

Lever Latch - 150mm

Finish: CP, PB, SCP, SN

Ref. No.	Size
● LB4051A	: 150x40mm

Lever Latch - 110mm


Ref. No.	Size
● LB4050A	: 110x40mm



Lever Privacy

Finish: PB

Ref. No.	Size
● LB4050P	: 110x40mm



Lever Bathroom

Finish: CP, PB, SCP, SN

Ref. No.	Size
● LB4051B	: 150x40mm



Lever Lock

Finish: CP, PB, SCP, SN

Ref. No.	Size
● LB4051C	: 150x40mm



Lever Eurofile

Finish: CP, PB, SCP, SN

Ref. No.	Size
● LB4051E	: 150x40mm



Lever Ovalprofile

Finish: PB

Ref. No.	Size
● LB4051U	: 150x40mm

VALENS

Scroll Lever on Backplate (Heavy)



Finish: SCP, CP, SN, PB

Lever Latch - 150mm

Ref. No.	Size
● LB4056A	: 150x40mm

Lever Latch - 118mm

Ref. No.	Size
● LB4055A	: 118x40mm



Lever Privacy

Finish: CP, PB

Ref. No.	Size
● LB4056P	: 110x40mm



Lever Bathroom

Finish: CP, PB, SCP, SN

Ref. No.	Size
● LB4056B	: 150x40mm



Lever Lock

Finish: CP, PB, SCP, SN

Ref. No.	Size
● LB4056C	: 150x40mm



Lever Eurofile

Finish: CP, PB

Ref. No.	Size
● LB4056E	: 150x40mm



Lever Ovalprofile

Finish: CP, PB

Ref. No.	Size
● LB4056U	: 150x40mm

GEORGIAN

Lever on Backplate



Lever Latch

Finish: PB

Ref. No.	Size
● LB4115A	: 110x45mm



Lever Privacy

Finish: PB


Ref. No.	Size
● LB4115P	: 110x45mm



Lever Bathroom

Finish: PB

Ref. No.	Size
● LB4115B	: 150x45mm



Lever Lock

Finish: PB

Ref. No.	Size
● LB4115C	: 150x45mm

SHAPED SCROLL

Lever on Backplate



Lever Europrofile

Finish: SCP, PB, CP, SN

Ref. No.	Size
● LB4030E	: 168x40mm



Lever Latch

Finish: SCP, PB, CP, SN

Ref. No.	Size
● LB4030A	: 168x40mm



Lever Bathroom

Finish: SCP, PB, CP, SN

Ref. No.	Size
● LB4030B	: 168x40mm



Lever Lock

Finish: SCP, PB, CP, SN

Ref. No.	Size
● LB4030C	: 168x40mm

Oval Mortice Knob



Finish: PB, CP, SCP, SN

Ref. No.	Size
● MK4000	: 56mm

Mushroom Mortice Knob



Finish: PB, CP, SCP, SN

Ref. No.	Size
● MK4015	: 56mm

Contract Rim Mortice Knob



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size
● MK4035	: 50mm

Architectural Reeded Mortice Knob



Finish: PB, CP, SCP

Ref. No.	Size
● MK4090	: 50mm

The modern combined range of door knobs consists of entrance, privacy, passage and dummy sets for easy access. Knobs are available in most common finishes like Polished Chrome, Satin Chrome, Polished Nickel, Satin Nickel, Antique Brass and Polished Brass to suit your requirements. Also, it is offered as sprung and un-sprung to meet out specific needs. Knobs are supplied with screws, spindles, grub screws fixing onto spindle

Oct Centre Door Knob



Finish: PB, CP, SCP, SN

Ref. No.	Size
● CD4000	: 63mm

MushroomCentre Door Knob



Finish: CP, SCP

Ref. No.	Size
● CD4010	: 76mm


**Architectural Casement
Fastener Reversible**
Finish: SN, PN

Ref. No.	Size
● WF440	: 57 x 13mm


Architectural Casement Stay
Finish: PN, SN, CP

Ref. No.	Size
● WF4120	: 254mm
● WF4122	: 305mm


Casement Fastener
Finish: PB, CP, SCP

Ref. No.	Size
● WF4412	: 110mm


Casement Stay - 8"
Finish: PB, CP, SCP


Ref. No.	Size
● WF4615	: 200mm

Casement Stay - 10"
Finish: PB, CP, SCP


Ref. No.	Size
● WF4620	: 250mm

Casement Stay - 12"
Finish: PB, CP, SCP, PN

Ref. No.	Size
● WF4625	: 300mm

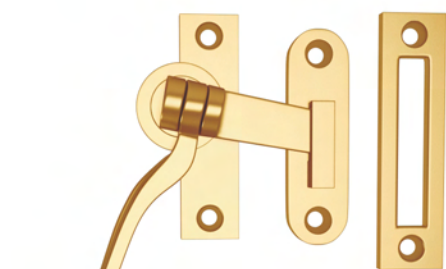
Georgian Casement Fastener
Finish: PB

Ref. No.	Size
● WF4403	: 110mm

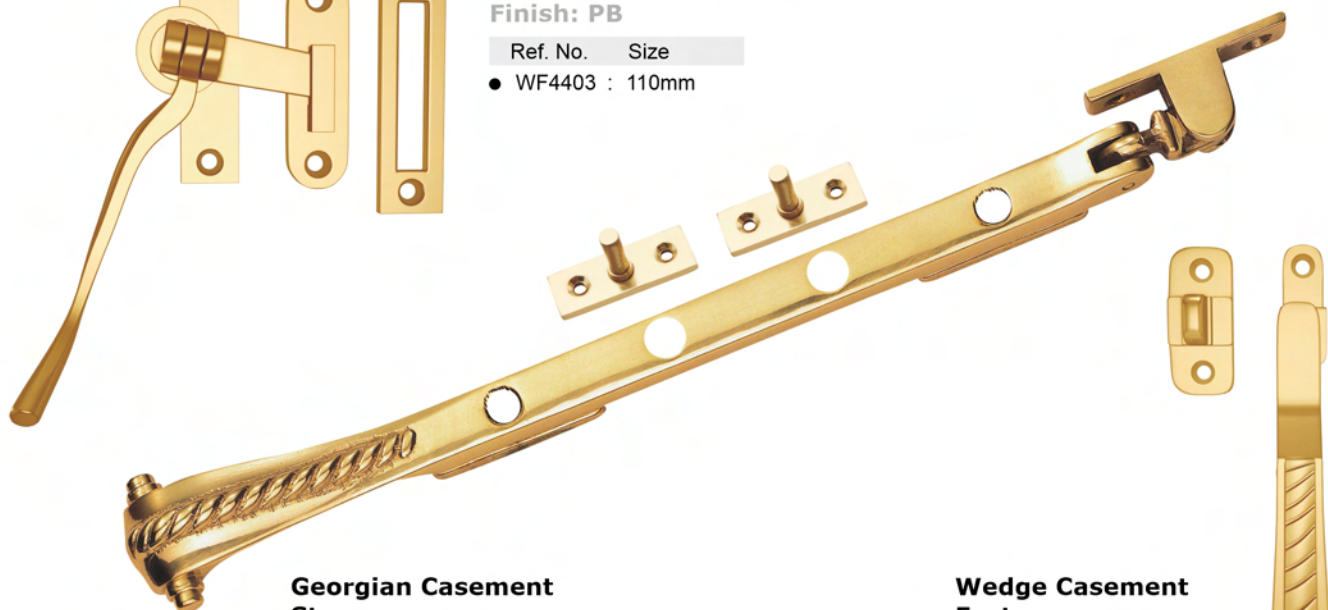
Georgian Casement Stay
Finish: PB

Ref. No.	Size
● WF4609	: 250mm
● WF4610	: 300mm

Wedge Casement Fastener
Finish: PB


Ref. No.	Size
● WF4495	: 200mm


Architectural Window Fastener - 120mm
Finish: SSS


Ref. No.	Size
● WF215	: 120mm


Architectural Casement Stay
Finish: SSS, PSS

Ref. No.	Size
● WF250	: 253mm

Brighton Fastener

Finish: PB, CP, SCP

Ref. No.
● WF4442

Sash Lift

Finish: PB, CP, SCP, PN, SN

Ref. No.
● WF4520

Stay Lock & Key



Finish: PB, CP

Ref. No.

- WF4200

Window Rack Bolt



Finish: PB, CP, SCP, W, SN

Ref. No.

- WF4205
- WF4206 with key

Window Lock



Finish: PB, CP, SN

Ref. No.

- WF4210

Window Lock



Finish: PB, CP, SCP

Ref. No.

- WF4215

Hinged Window Lock




Finish: W

Ref. No.

- WF4220

Rack Bolt Key



Ref. No.

- WF4225

Hinged Window Lock



Small Heavy Sash Stop

Finish: W, BRN, SN

Ref. No.

- WF4230

Hinged Window Lock



Flush Fit Sash Stop

Finish: W

Ref. No.

- WF4235

Key



Large Heavy Sash Stop

Finish: PB, PN

Ref. No.

- WF4240

Small Heavy Sash Stop



Finish: CP, SCP

Ref. No.

- WF4040

Flush Fit Sash Stop



Finish: PB, CP, SCP

Ref. No.

- WF4045

Large Heavy Sash Stop



Finish: PB, CP, SCP

Ref. No.

- WF4050


Finishes:

SSS

PSS

PB/PVD

SB/PVD

BL/PVD

MAB

SCG/PVD

GM/PVD


BBV/PVD

Other finishes are available on order


Ref. No.	Size (A x B x C)
● HINBB433	: 102 x 76 x 3mm
● HINBB43.53	: 102 x 89 x 3mm
● HINBB443	: 102x 102x 3mm
● HINBB533	: 127 x 76 x 3mm
● HINBB4.543.4	: 114x102x3.4mm
● HINBB4.54.53.4	: 114x114x3.4mm

Features

- Suitable for 120min timber and 240min metal fire/smoke resistant doors
- Double ball bearing, five knuckle hinge
- Successfully tested for conformity to all the requirements of BS EN1935
- Load bearing capacity up to 120kg
- Available square or radius
- Tested to Grade 7: 200,000 cycles
- Pre-cut intumescent hinge pads available

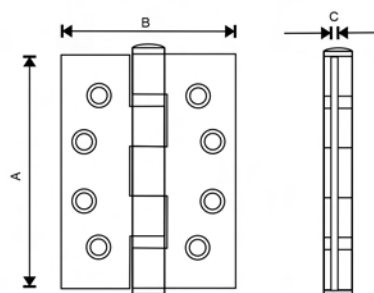

BS EN 1935 Classification

4	7	6	1	1	4	0	13
---	---	---	---	---	---	---	----

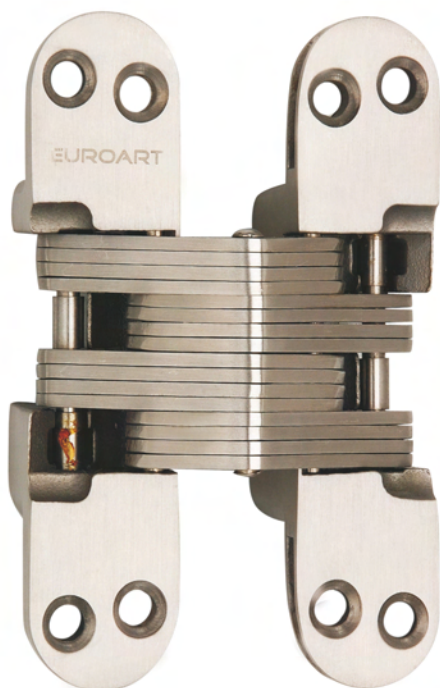

Features

- Zinc alloy body, hardened steel pins
- Totally invisible when door is closed
- Non-handed
- Suitable for timber and metal doors

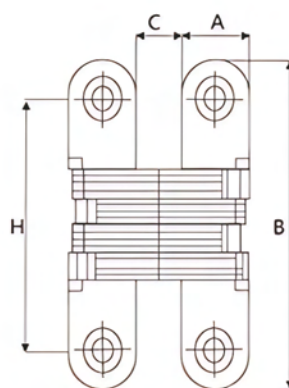

Product Code	Size Thickness	Min. door Thickness	Weight Rated	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
BH1345	13x45mm	19mm	10 Kg.	13	45	9	19	0.8	18	5	30.5
BH1360	13x60mm	19mm	14 Kg.	13	60	9	30.5	0.8	18	6	47
BH1670	16x70mm	22mm	25 Kg.	16	70	11	34	0.8	22.5	7.4	51
BH1995	19x95mm	28mm	35 Kg.	19	95	13	52.5	1.2	27	9	73
BH25117	25x117mm	35mm	45 Kg.	25	118	18	61.5	1	36.5	11.3	90.5
BH28117	28x117mm	41mm	55 Kg.	28	118	22	65.3	1.4	41	9.5	93
BH33139	33x139mm	47mm	70 Kg.	35	139.5	27.5	74.5	1.6	51	11.5	113.5




SN



MAB




CP



PB



3D160/3D200

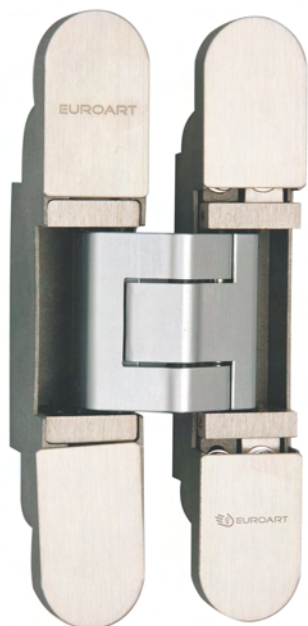

CF Version-No Visible Screw



Standard

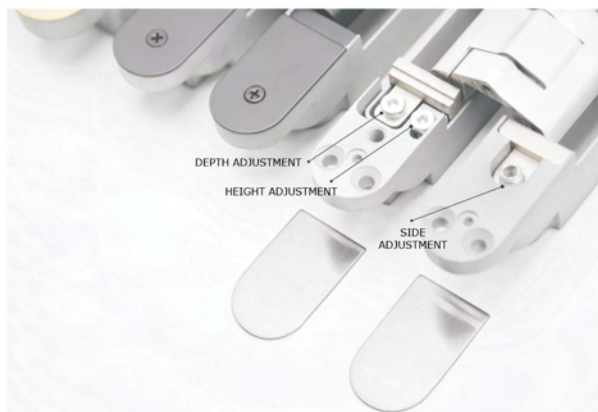


Features

- Completely concealed for unrebated doors with timber, steel and aluminium frames
- Cycle tested: 200,000
- Right hand and left hand applicable
- Three-dimensionally adjustable
- Opening angle 180 degrees
- Pre-cut intumescent hinge pads available


Ref. No.	Size	Load Capacity
----------	------	---------------

- **3D160** 28 x 160mm 80kg.
Minimum door thickness required: 36mm
2 Pcs. for door width upto 900mm
3 Pcs. for door width upto 1000mm

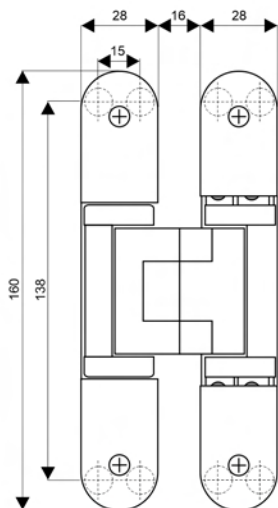

Ref. No.	Size	Load Capacity
----------	------	---------------

- **3D200** 32 x 200mm 120kg.
Minimum door thickness required: 40mm
2 Pcs. for door width upto 1000mm
3 Pcs. for door width upto 1150mm

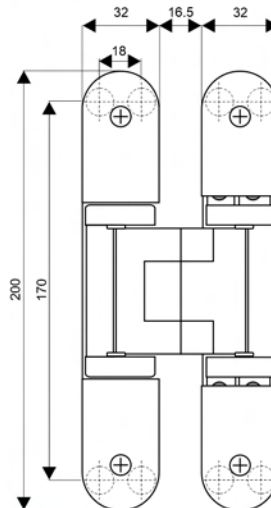

SCG



SB



MAB



SSS




PB




MBL



DLA7255EP : 55mm backset
DLA7260EP : 60mm backset
DLA7265EP : 65mm backset

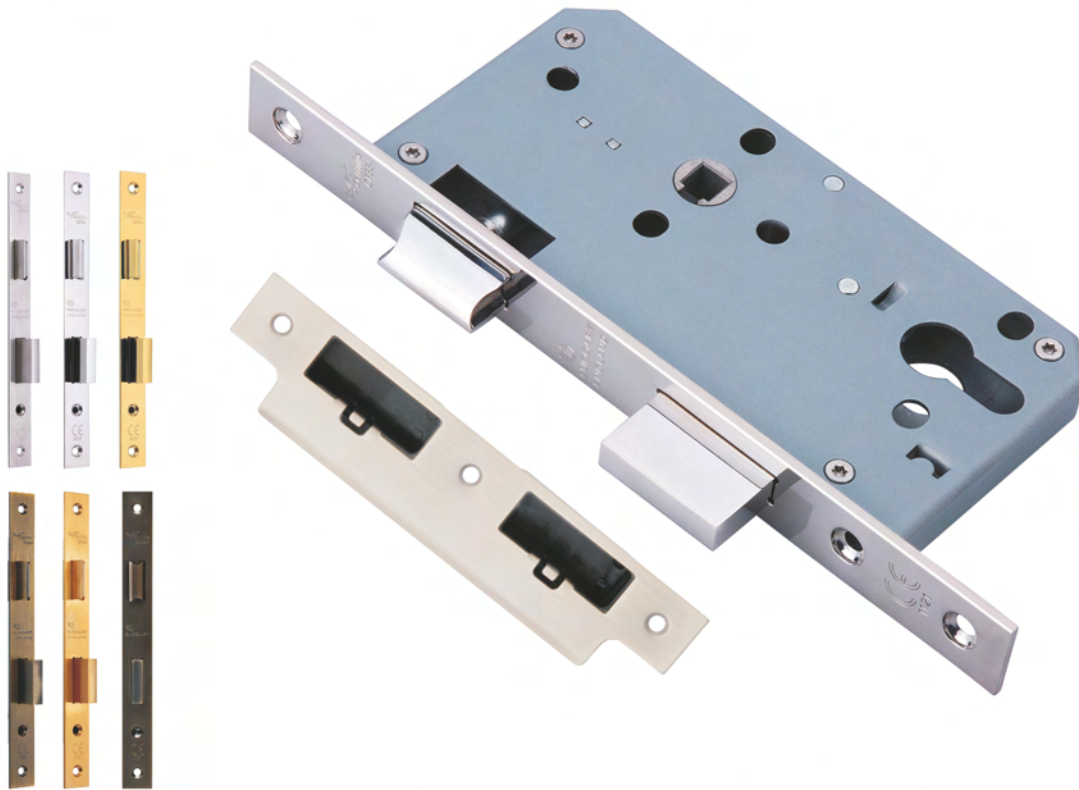

Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD

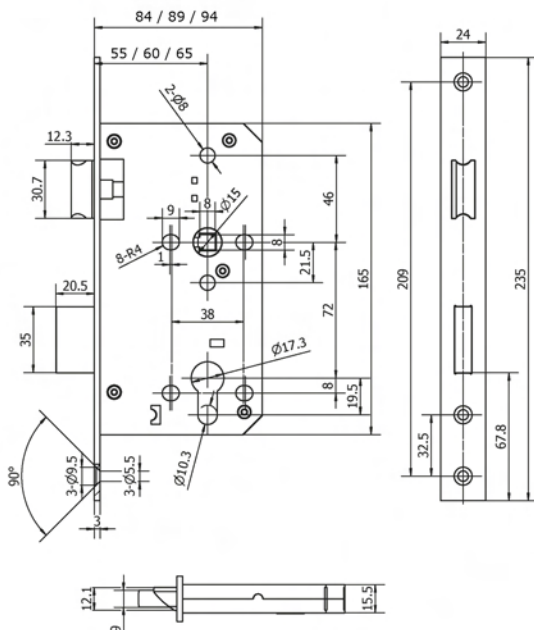

Features


- 55/60/65mm backset, 72mm centres.
- SS 304 forend, strike plate and follower.
- SS 304 latch bolt, SS 304 dead bolt.
- Tested to Grade X: 200,000 test cycles.
- Forend and strike plate available square or radius.
- Pierced to accept bolt through furniture and escutcheons at 38mm centres.
- Suitable for 120min timber and 240min metal doors.
- Cylinder can withdraw both latch and deadbolt - offers convenience and safety combined with security.
- For use by public where there is little incentive to exercise care and high chance of misuse.
- Supplied with anti-rattle strike plate.




BS EN 12209 Classification

3	X	8	1	0	G	3	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---

DLA0055L : 55mm backset
DLA0060L : 60mm backset
DLA0065L : 65mm backset

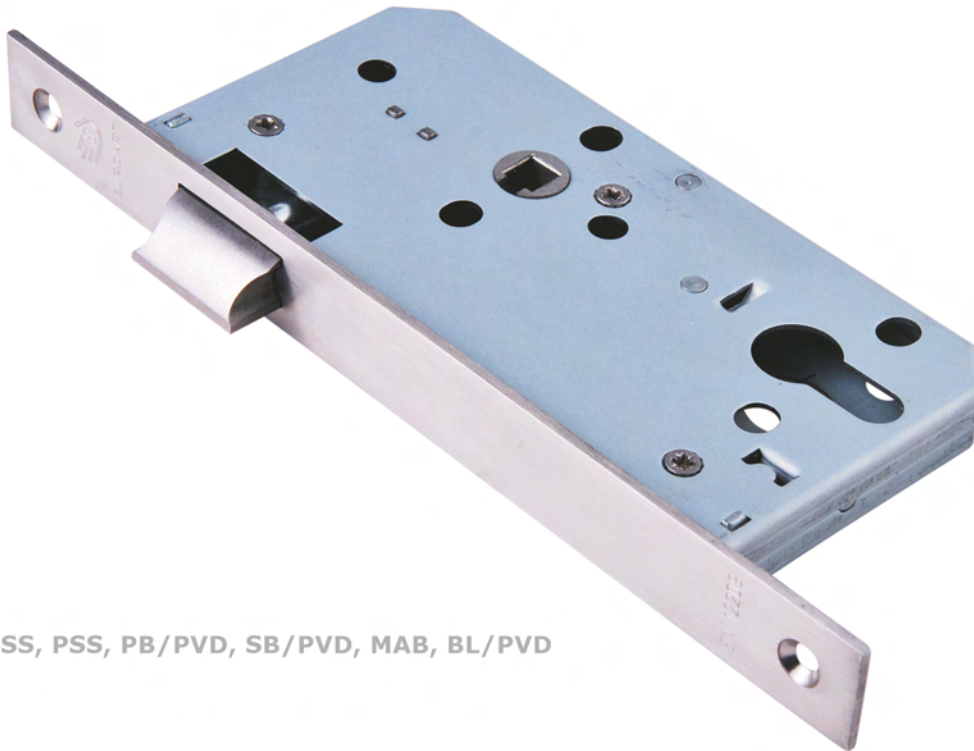

Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD

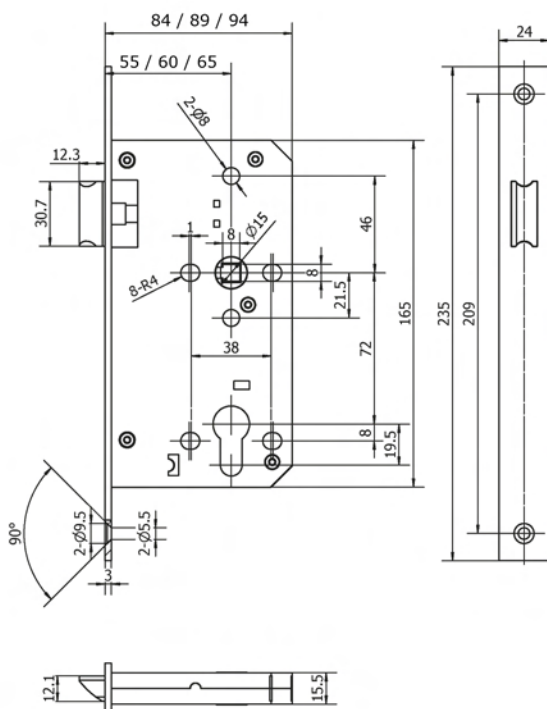


Features

- 55/60/65mm backset
- SS 304 forend, strike plate and follower
- SS 304 Latch
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture at 38mm centres
- Suitable for 120min timber and 240min metal doors
- Lever Handle operates latch
- For use by public where there is little incentive to exercise care and high chance of misuse

BS EN 12209 Classification

3	X	8	1	0	G	0	B	C	2	0
---	---	---	---	---	---	---	---	---	---	---

DLA7855WC : 55mm backset
DLA7860WC : 60mm backset
DLA7865WC : 65mm backset

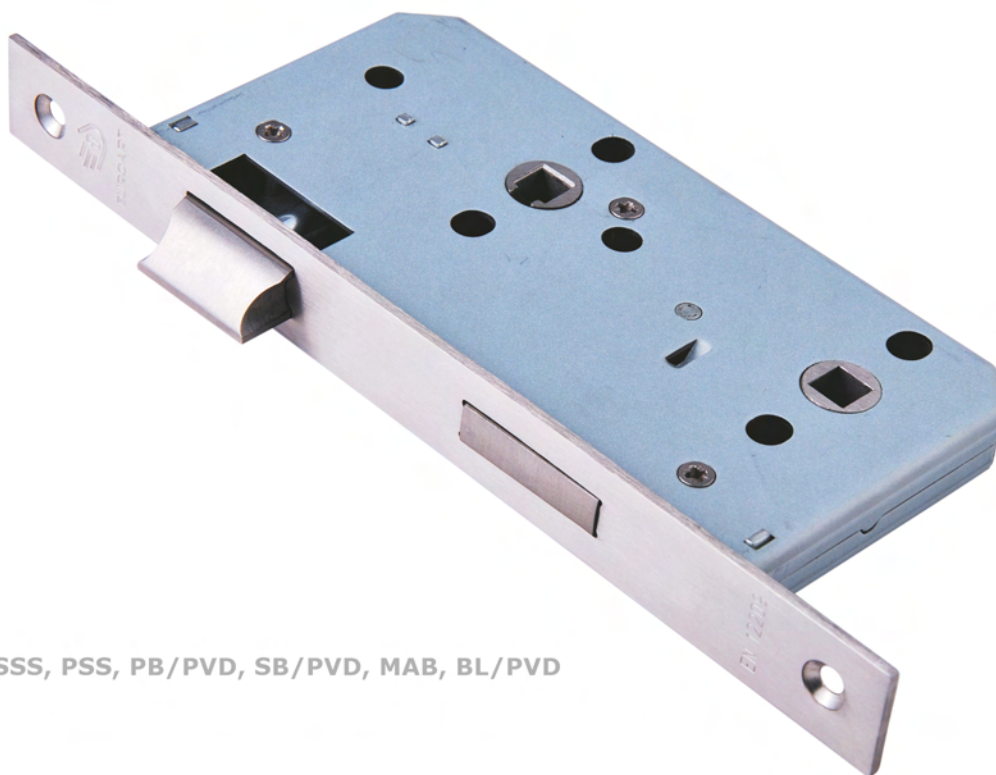


BS EN 12209



10 10 YEARS
MECHANICAL
GUARANTEE

CE
0905

Finish: SSS, PSS, PB/PVD, SB/PVD, MAB, BL/PVD

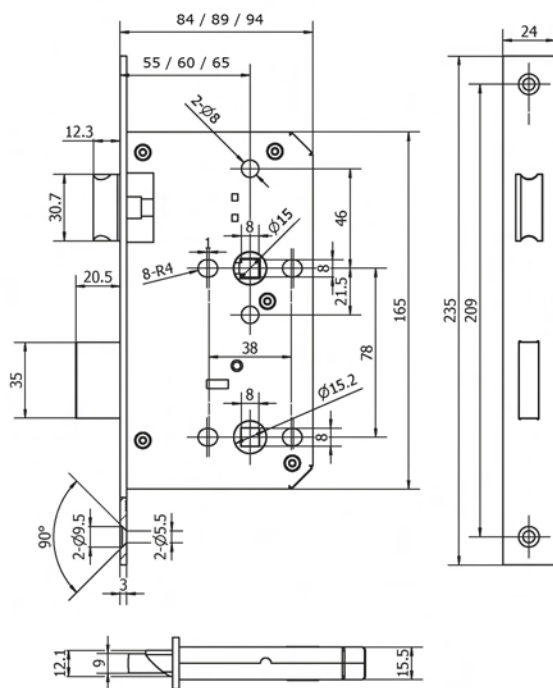

Features

- 55/60/65mm backset, 78mm centres
- SS 304 forend, strike plate and follower
- SS 304 latch bolt, SS 304 dead bolt
- Tested to Grade X: 200,000 test cycles
- Forend and strike plate available square or radius
- Pierced to accept bolt through furniture and escutcheons at 38mm centres
- Lever handle retracts latchbolt. Thumbturn operates deadbolt

BS EN 12209 Classification

3	X	9	1	0	G	-	B	0	2	0
---	---	---	---	---	---	---	---	---	---	---


Sash Lock - 3 Lever



Finish: PB, SSS, EB, NP

Ref. No	Size
● LS1486	: 63mm
● LS1487	: 75mm

Sash Lock - 5 Lever

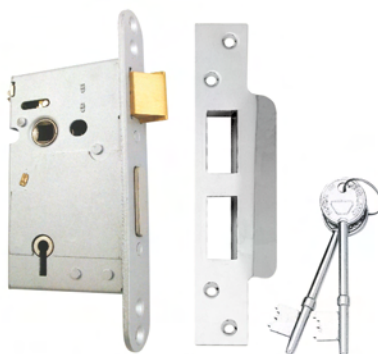

Finish: PB, SSS

Ref. No	Size
● LS1492	: 63mm
● LS1493	: 75mm


Sash Lock - 5 Lever (British Standard)



Finish: PB, SSS

Ref. No	Size
● LS1498	: 63mm
● LS1499	: 75mm

Dead Lock - 5 Lever

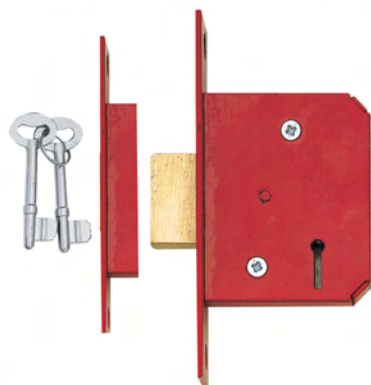

Finish: PB, SSS

Ref. No	Size
● LS1504	: 63mm
● LS1505	: 75mm

Dead Lock - 5 Lever (British Standard)



Finish: PB, SSS

Ref. No	Size
● LS1516	: 63mm
● LS1517	: 75mm

Dead Lock - 3 Lever (British Standard)



Finish: PB, SSS

Ref. No	Size
● LS1510	: 63mm
● LS1511	: 75mm


Sash Lock Case-Euro



Finish: PB, SSS

Ref. No	Size
● LS1528	: 63mm
● LS1529	: 75mm

Archi. Bathroom Lock

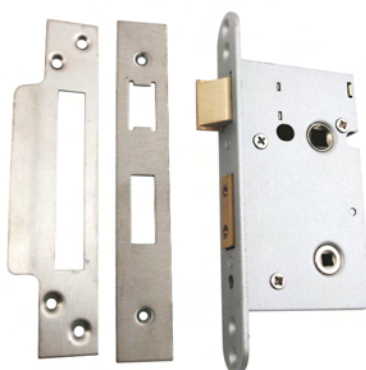

Finish: SSS, PSS

Ref. No	Size
● LS1531	: 63mm
● LS1532	: 75mm

Tubular Latch



Finish: EB, NP

Ref. No	Size
● LS1585	: 63mm
● LS1586	: 75mm

Rim Night Latch



Finish: EB, CP

Ref. No	Type
● LS2004	: standard
● LS2005	: narrow

Night Latch



Finish: EB, CP, SN, SCP

Ref. No	Size
● LS1986	: 40mm

Night Latch



Finish: EB, CP, SN, SCP

Ref. No	Size
● LS1994	: 60mm

Night Latch Cylinder



Finish: EB, CP, SCP

Ref. No
● LS2025

Pad Lock



Finish: PB

Ref. No	Size
● LS2015	: 20mm
● LS2016	: 25mm
● LS2017	: 32mm
● LS2018	: 38mm
● LS2019	: 50mm
● LS2020	: 60mm


Rim Lock



Finish: EB, CP, SCP, GR, BL

Ref. No	Size
● LS1591	: 150x100mm

Fire Brigade Lock

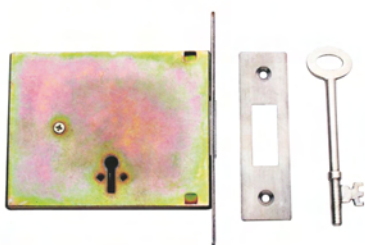

Ref. No

- LS1546 : FB1
- LS1547 : FB2

Key



Ref. No

- LS1552 : FB1
- LS1553 : FB2


CYC Series

- Solid brass body
- Top and bottom pins made of solid brass
- Key manufactured from brass
- Supplied with three 2.2mm dimple keys

Double Cylinder




Ref. No.	Size
• CYC265	: 65mm
• CYC275	: 75mm
• CYC285	: 85mm

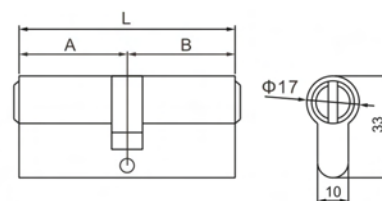

Key and Turn Cylinder




Ref. No.	Size
• CYC365	: 65mm
• CYC375	: 75mm
• CYC385	: 85mm

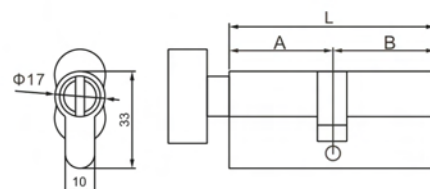

Single Cylinder



Ref. No.	Size
• CYC145	: 45mm



Finish: SN, MAB, PC, SB, PB, MBL

BS EN 1303 Classification

1	6	0	B	0	C	4	0
---	---	---	---	---	---	---	---

Architectural Ring Door Kocker



Finish: CP, SCP, SN, PN

Ref. No.	Size
● DK605	: 134x78mm

Lion Head Kocker



Finish: PB, CP

Ref. No.	Size
● DK665	: 175mm

URN Kocker



Finish: PB, CP, SCP

Ref. No.	Size
● DK645	: 150mm
● DK646	: 200mm

Slim Kocker



Finish: PB, CP, SCP

Ref. No.	Size
● DK630	: 200mm

Scroll Kocker



Finish: PB, CP, SCP

Ref. No.	Size
● DK620	: 150mm

Bell Push - Oblong



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size
● BP115	: 75x25mm

Cylinder Pull



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size
● CP720	: 76x38mm

A polished and lacquered cast brass door knocker is suitable for use with most kind of outside main doors. Available in different sizes, shapes and finishes gives you a wide range of options to choose from. Beautifully design lion knocker in shiny brass finish with solid brass construction offering an elegant look and enhances the beauty of the door. Supplied with screws and fixings, please enquire sales team for skin pack or blister pack orders.

Contract Letter Plate



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size	Aperture	C/C
● LP420	: 200x75mm	145x42mm	175mm
● LP421	: 250x75mm	185x40mm	220mm
● LP422	: 250x100mm	185x57mm	220mm
● LP423	: 300x100mm	248x60mm	275mm
● LP424	: 350x113mm	284x63mm	326mm
● LP425	: 400x120mm	328x75mm	370mm
● LP426	: 250x100mm	185x57mm	220mm
● LP427	: 300x100mm	248x60mm	275mm

Folding Letter Cage



Finish: W

Ref. No.	Size
● LC400	: 394x300mm
● LC401	: 394x350mm

Hat & Coat Hook



Finish: PB, CP, SCP, SN

Ref. No.	Size
● HK420	: 125mm

Coat Hook Double



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size
● HK455	: 50mm

Coat Hook Single



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size
● HK465	: 50mm

Numerals - 2" 0-9

0 to 9 Numerals available
in all finishes



Finish: PB, CP, SCP

Ref. No.	Size
● NUM200	: 50mm

Numerals - 3" 0-9

0 to 9 Numerals available
in all finishes



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size
● NUM205	: 75mm

Letters - 2" A-Z


A to Z Alphabets available
in all finishes



Finish: PB, CP, SCP, SN, PN

Ref. No.	Size
● ALP200	: 50mm

Narrow Barrel Bolt Necked

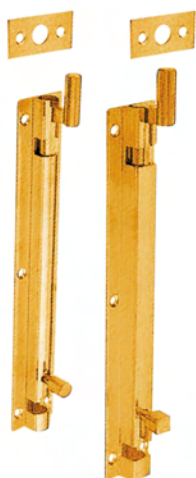

Finish: PB, CP, SAA

Ref. No.	Size
----------	------

Brass

- DB580 : 50mm
- DB581 : 63mm
- DB582 : 75mm
- DB583 : 100mm
- DB584 : 150mm

Aluminium

- DB810 : 50mm
- DB811 : 75mm
- DB812 : 100mm
- DB813 : 150mm

Heavy Barrel Bolt Straight



Finish: PB, CP, SCP

Ref. No.	Size
----------	------

- DB508 : 100x38mm
- DB509 : 150x38mm
- DB510 : 200x38mm
- DB511 : 300x30mm
- DB512 : 450x30mm

Narrow Barrel Bolt Straight



Finish: PB, CP, SAA

Ref. No.	Size
----------	------

Brass

- DB590 : 38mm
- DB591 : 50mm
- DB592 : 63mm
- DB593 : 75mm
- DB594 : 100mm
- DB595 : 150mm

Aluminium

- DB800 : 38mm
- DB801 : 50mm
- DB802 : 63mm
- DB803 : 75mm
- DB804 : 100mm
- DB805 : 150mm

Heavy Barrel Bolt Necked



Finish: PB, CP, SCP

Ref. No.	Size
----------	------

- DB535 : 100x38mm
- DB536 : 150x38mm
- DB537 : 200x38mm
- DB538 : 305x38mm

Door Chain and Suffolk Latch

Heavy Duty Door Chain



Finish: PB, CP, SCP

Ref. No.

- DC410

Door Guard Chain



Finish: PB, CP, EB

Ref. No.

- DC405


**D Concealed Rose
Pull Handle**

Finish: PAA

Ref. No.	Size
● AL8079	: 225x50mm
● AL8080	: 300x50mm

**D Bend Bolt Through
Pull Handle**


Ref. No.	Size
● AL8085	: 225x19mm
● AL8086	: 300x19mm

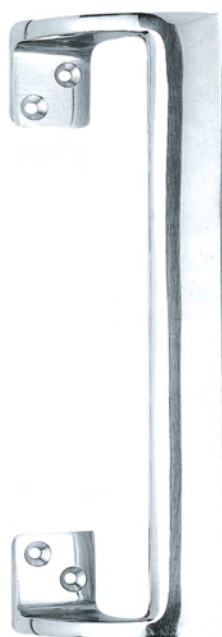**Cranked
Pull Handle**


Ref. No.	Size
● AL8091	: 225mm
● AL8092	: 300mm

Bow Handle


Ref. No.	Size
● AL8107	: 150mm
● AL8108	: 182mm

Aluminium Pioggia Range

Lever Lock Bathroom


Ref. No.	Size
● AL8051	: 150mm

Lever Lock


Ref. No.	Size
● AL8054	: 150mm

Lever Latch



Ref. No.	Size
● AL8057	: 80mm

Hand Rail Bracket


Ref. No.	Size
● AL8196	: 63mm
● AL8197	: 175mm

Round Indicator Bolt


Ref. No.	Size
● AL8237	: 50mm

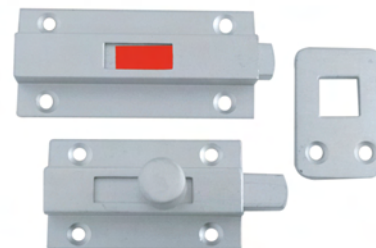Indicator Bolt


Ref. No.
● AL8207

Tubular Door Stop-Rose


Ref. No.	Size
● AL8212	: 75mm

Door Stop - Oval


Ref. No.
● AL8217

Door Stop - Shielded


Ref. No.
● AL8222

Toilet Roll Holder


Ref. No.
● AL8227

**Wedge Casement
Fastener**


Ref. No.
● AL8232

Casement Stay


Ref. No.
● AL8243



412/Q1 450 x 150 (50)

412/UL 650 x 250 (70)(R)



413/Q1 450 x 150 (50)

413/UL 650 x 250 (70)(R)



465/Q1 450 x 150 (50)

465/UL 650 x 250 (70)(R)



416/Q1 450 x 150 (50)

416/UL 650 x 250 (70)(R)



459/Q1 450 x 150 (50)

459/UL 650 x 250 (70)(R)



460/Q1 450 x 150 (50)

460/UL 650 x 250 (70)(R)



405/Q1 450 x 150 (50)

405/UL 650 x 250 (70)(R)



411/Q1 450 x 150 (50)

411/UL 650 x 250 (70)(R)



270/PM 400 x 300 (R)



308/KG 200 x 100 (R)


083/IK 150 x 200 (R)
083/MP 300 x 400 (R)


208/TK 600 x 200 (R)



NSMK100

We have digital screen printing systems.

We cater for special orders and can supply signs on PVC (plastic/rigid) & metal sheet.

For details please ask for our Sign Catalogue.

Unisex Symbol



Finish: SSS

Ref. No.	Size
● SIGN201	76mm

Male Symbol



Finish: SSS

Ref. No.	Size
● SIGN202	76mm

Female Symbol



Finish: SSS

Ref. No.	Size
● SIGN203	76mm

Disabled Symbol



Finish: SSS

Ref. No.	Size
● SIGN204	76mm

FDKC Sign



Finish: SSS

Ref. No.	Size
● SIGN212	76mm

FDKL Sign



Finish: SSS

Ref. No.	Size
● SIGN213	76mm

FDKS Sign




Finish: SSS

Ref. No.	Size
● SIGN214	76mm

FS Strips Intumescent Strip - Fire & Smoke

Intumescent fire and smoke seals for a safe and effective barrier against fire, cold smoke and hot gases.

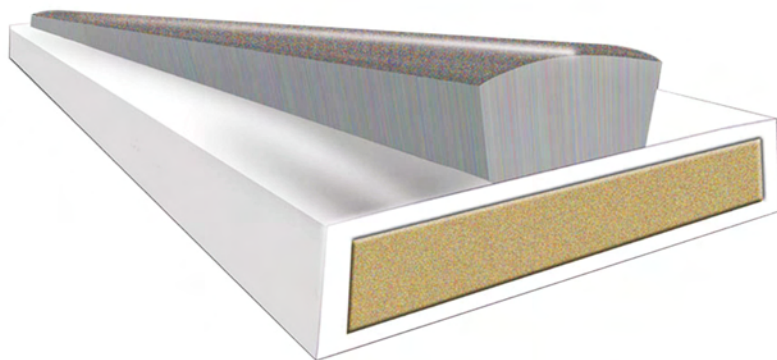


To Order & Specify Please quote
Quantity/Trade Name/Product Ref./
PVC Colour/Brush Colour/Length

Product Ref	Fire Rating	Profile Size	Lengths
AF1004 FS	30min	10mm x 4mm	2.1m
AF1504 FS	30min	15mm x 4mm	2.1m
AF2004 FS	60min	20mm x 4mm	2.1m
AF2504 FS	60min	25mm x 4mm	2.1m
AF3004 FS	60min	30mm x 4mm	2.1m

FO Strips Intumescent Strip - Fire

Intumescent fire only seal for use where no smoke sealing is required.

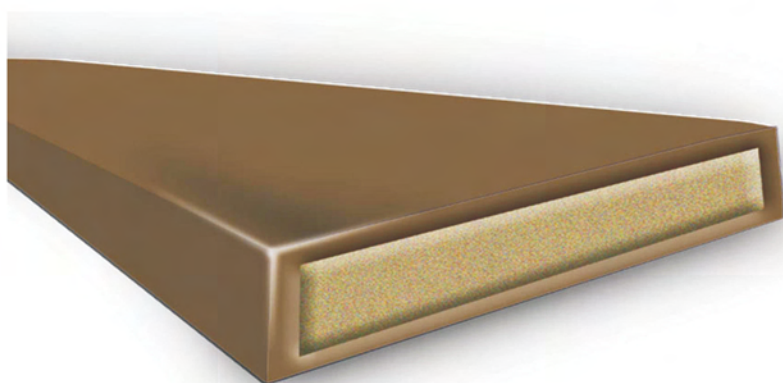

Finishes



Brown



White



Black

Product Ref	Fire Rating	Profile Size	Lengths
AF1004 FO	30min	10mm x 4mm	2.1m
AF1504 FO	30min	15mm x 4mm	2.1m
AF2004 FO	60min	20mm x 4mm	2.1m
AF2504 FO	60min	25mm x 4mm	2.1m
AF3004 FO	60min	30mm x 4mm	2.1m

To Order & Specify Please quote
Quantity/Trade Name/Product Ref./
PVC Colour/Length

DP104


One pair lever handle,
one pair of 3" hinges &
one pc. tubular latch 63mm
(all comes with screw)

Finish: SN

DP575


One pair lever handle,
one pair of 3" hinges &
one pc. tubular latch 63mm
(all comes with screw)

Dual Finish: SN/CP

DP574


One pair lever handle,
one pair of 3" hinges &
one pc. tubular latch 63mm
(all comes with screw)

Dual Finish: SN/CP

DP580


One pair lever handle,
one pair of 3" hinges &
one pc. tubular latch 63mm
(all comes with screw)

Finish: CP

DP4042


One pair lever handle,
one pair of 3" hinges &
one pc. tubular latch 63mm
(all comes with screw)

Finish: CP


DP4011


One pair lever handle,
one pair of 3" hinges &
one pc. tubular latch 63mm
(all comes with screw)

Finish: SN

DP4056A


One pair lever handle,
one pair of 3" hinges &
one pc. tubular latch 63mm
(all comes with screw)

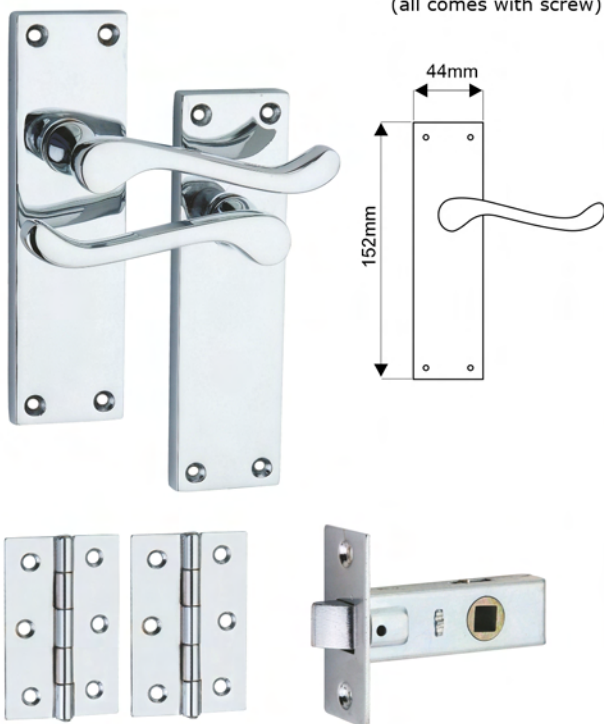

Finish: CP

DP4056B


One pair lever handle,
one pair of 3" hinges &
one pc. bathroom lock
(all comes with screw)

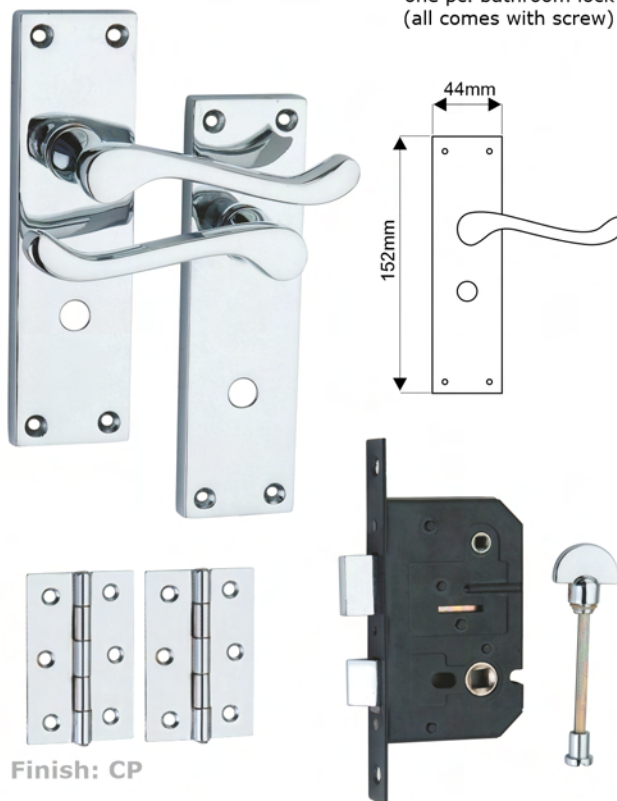

Finish: CP

DP4056C


One pair lever handle,
one pair of 3" hinges &
one pc. 3 Lvr. sash lock
(all comes with screw)

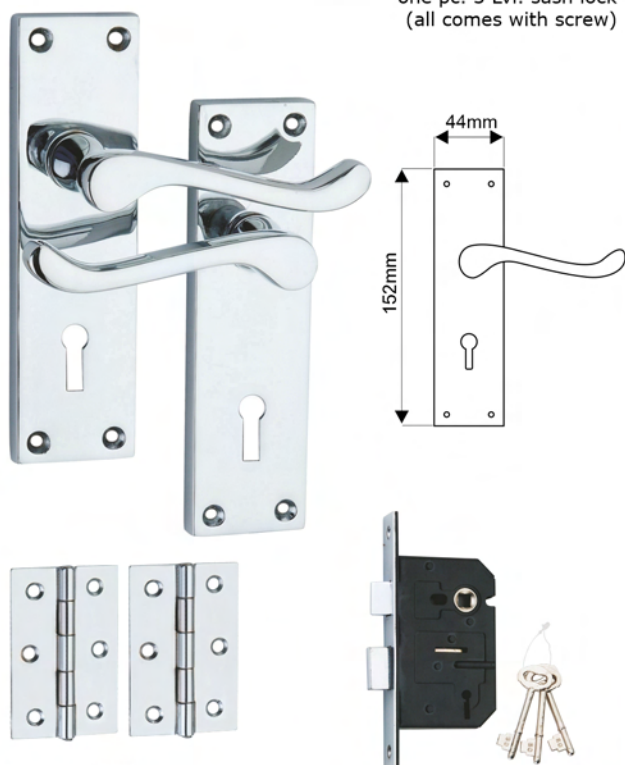

Finish: CP

DP4030A


One pair lever handle,
one pair of 3" hinges &
one pc. bathroom lock
(all comes with screw)

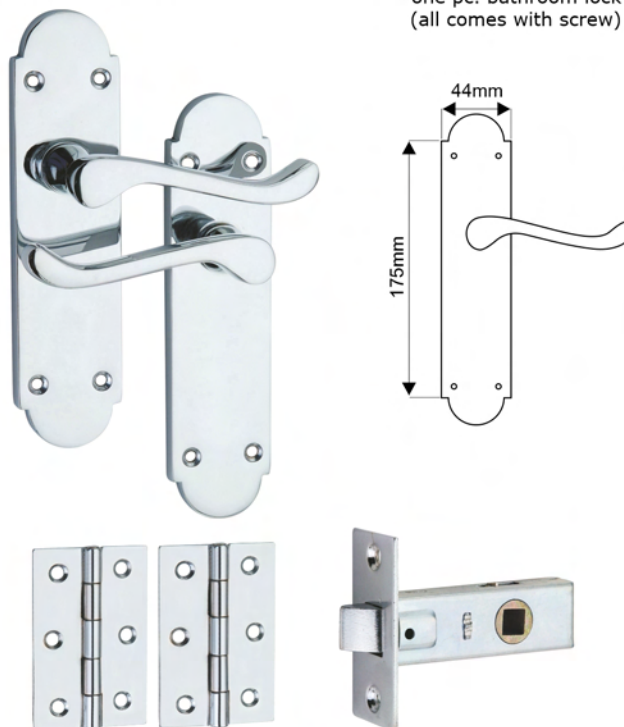

Finish: CP

DP4030B


One pair lever handle,
one pair of 3" hinges &
one pc. bathroom lock
(all comes with screw)

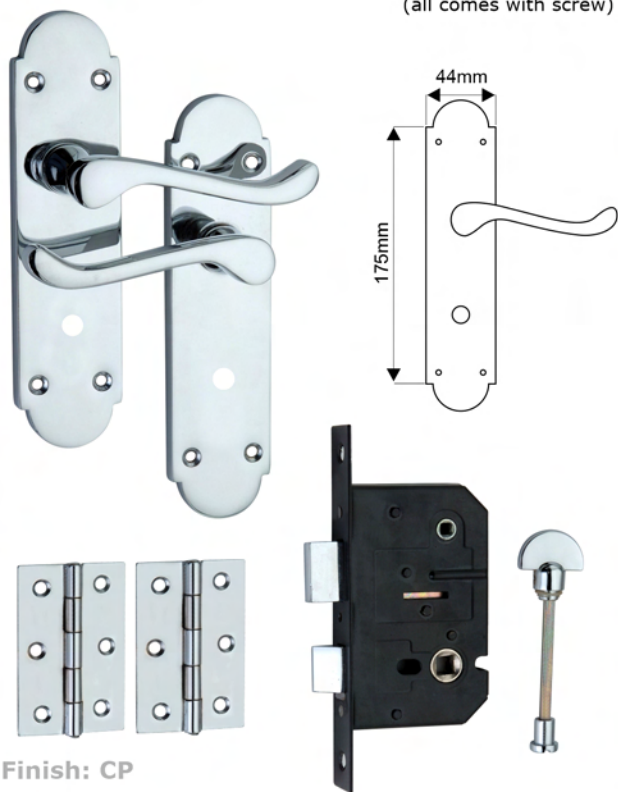

Finish: CP

DP4030C

One pair lever handle,
one pair of 3" hinges &
one pc. 3 Lvr. sash lock
(all comes with screw)

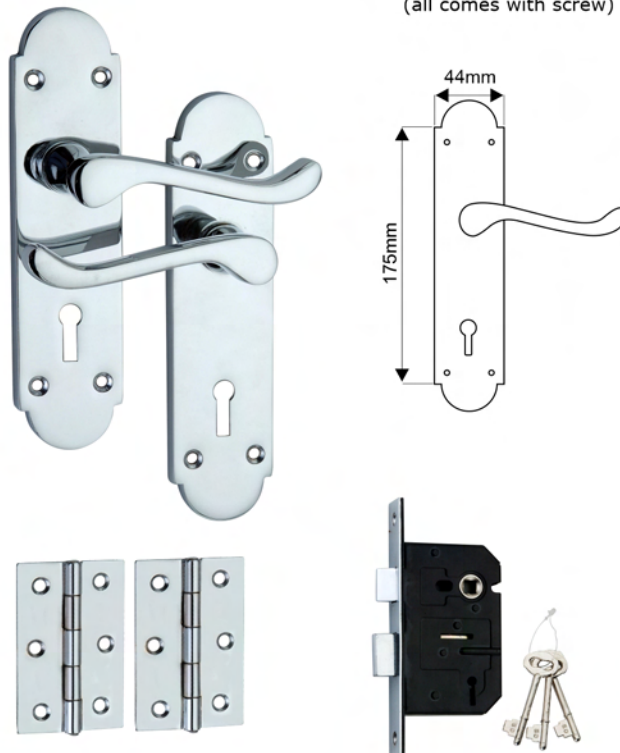

Finish: CP

D Handle on Round Plate


Finish: SSS

Ref. No.	Size
● LBS2021	19mm

Jovian Flat Lever on Backplate Latch

One pair lever handle,
one pair of 3" hinges &
one pc. bathroom lock
(all comes with screw)



Finish: PB


Ref. No.	Size
● LB4050A	110x40mm

DP101


Finish: SSS

DP102


Finish: SSS

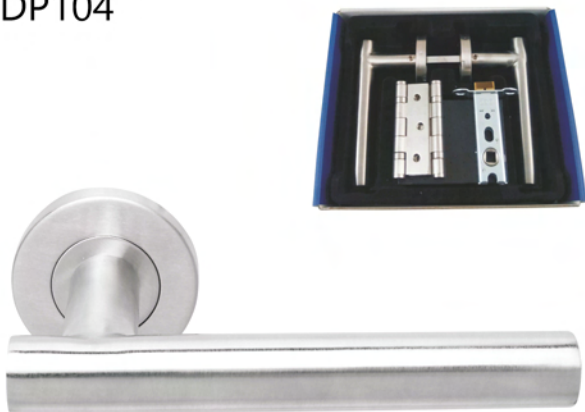DP104


Finish: SSS

DP105



Finish: SSS

DP106


Finish: SSS



Fingerprint



Mobile App



RFID Key



Keypad



Mechanical Key

The perfect solution for narrow doors, offering advanced security features without compromising on space. Designed to fit seamlessly into narrow door frames, this series combines convenience and protection in one sleek package. With Bluetooth ekey, WiFi connectivity (additional gateway/hub required), fingerprint recognition, pin codes, non-hackable cards, and a mechanical key, you can enjoy comprehensive security options tailored to your needs. Whether you're looking to upgrade your home or office security, the Digital Lock provides peace of mind with its robust features and effortless integration. Say goodbye to narrow door woes and hello to enhanced security with EuroArt EA220 Slim.



Features:

- Fingerprint : Capacitive Fingerprint (Up to 200 unique accesses)
- Key-pad or password : 1 Master access, up to 149 unique user password.
- RFID Card : Up to 100 unique accesses.
- Manual Key : 2 Keys in the set.
- User access : Admin, User & Guest.
- Bluetooth Key : Bluetooth app access.
- WiFi : Optional with wireless gateway (Not included in standard package)
- Locking mode : Auto locking, privacy locking manual locking, Defence locking
- Application : Residential, Office, Airbnb, Condo, Apartment Projects.
- Operations : Panic exit, Non handed operation adult trails (with mobile app)




BLACK



SILVER GREY

Specification:

Battery :	AA+(4Battery) Micro USB for Emergency.
Battery Life :	12 Months Battery Life.
Working Temperature :	-25° ~ 60°
Working Humidity :	0% ~ 90%
Door Thickness :	35 ~ 65mm.
Material :	Aluminum Alloy
Test Cycle :	2,50,000 Cycle Tested, 200 Hours Salt Spray Tested
Lock Dimension :	280mm(H) 33mm(W)* 22mm(T).
Finish option :	Black, Silver Grey

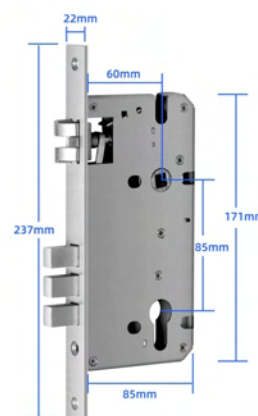



Fingerprint



Mobile App



RFID Key



Keypad



Mechanical Key

The perfect solution for narrow doors, offering advanced security features without compromising on space. Designed to fit seamlessly into narrow door frames, this series combines convenience and protection in one sleek package. With Bluetooth ekey, WiFi connectivity (additional gateway/hub required), fingerprint recognition, pin codes, non-hackable cards, and a mechanical key, you can enjoy comprehensive security options tailored to your needs. Whether you're looking to upgrade your home or office security, the Digital Lock provides peace of mind with its robust features and effortless integration. Say goodbye to narrow door woes and hello to enhanced security with EuroArt EA100 Slimline.



Features:


- Fingerprint : Capacitive Fingerprint (Up to 200 unique accesses)
- Key-pad or password : 1 Master access, up to 149 unique user password.
- RFID Card : Up to 100 unique accesses.
- Manual Key : 2 Keys in the set.
- User access : Admin, User & Guest.
- Bluetooth Key : Bluetooth app access.
- WiFi : Optional with wireless gateway (Not included in standard package)
- Locking mode : Auto locking, privacy locking manual locking, Defence locking
- Application : Residential, Office, Airbnb, Condo, Apartment Projects.
- Operations : Panic exit, Non handed operation adult trails (with mobile app)



EA 100 Slimline SSS

Specification:

Battery :	AA+(4Battery) Micro USB for Emergency.
Battery Life :	12 Months Battery Life.
Working Temperature :	-25° ~ 60°
Working Humidity :	20% ~ 95%
Door Thickness :	35 ~ 65mm.
Material :	304 Stainless Steel
Test Cycle :	2,50,000 Cycle Tested, 200 Hours Salt Spray Tested
Lock Dimension :	305mm(H) 38mm(W)* 23mm(T).
Finish option :	Satin Stainless Steel

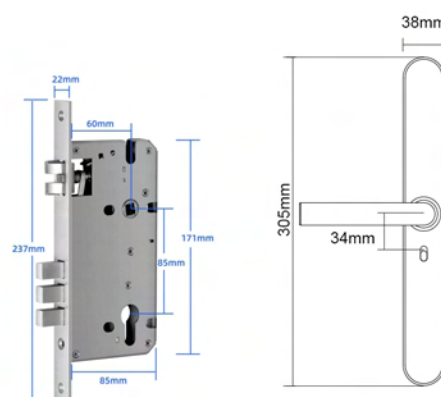



BEFORE



Fingerprint



Mobile App



RFID Key



Keypad




Mechanical Key

Introducing the EA Retrofit Series Digital Lock – the smart solution for upgrading your home security hassle-free. Why endure door damage when you can effortlessly retrofit this advanced lock yourself? With Bluetooth Ekey, WiFi connectivity (additional gateway/hub required), fingerprint recognition, pin codes, Non-hackable cards, and a Mechanical key, enjoy comprehensive security features seamlessly integrated into your existing setup. DIY installation takes just minutes, allowing you to enhance your home's security swiftly and effortlessly. Plus, receive notifications via WiFi gateway from anywhere in the world, ensuring you're always in the know about your home's security. Say goodbye to door damage and hello to peace of mind with EuroArt Retrofit Series – where security meets simplicity, without compromising your door's integrity



Features:

- Fingerprint : Capacitive Fingerprint (Up to 200 unique accesses)
- Key-pad or password : 1 Master access, up to 149 unique user password.
- RFID Card : Up to 100 unique accesses.
- Manual Key : 2 Keys in the set.
- User access : Admin, User & Guest.
- Bluetooth Key : Bluetooth app access.
- WiFi : Optional with wireless gateway (Not included in standard package)
- Locking mode : Auto locking, privacy locking manual locking, Defence locking
- Application : Residential, Office, Airbnb, Condo, Apartment Projects.
- Operations : Panic exit, Non handed operation adult trails (with mobile app)

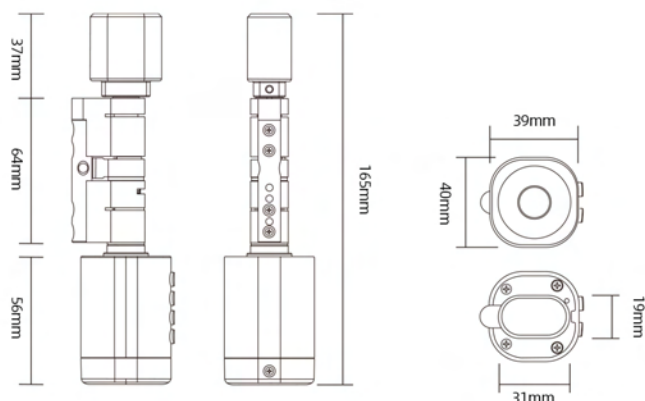


EA Retro MBL

Specification:


Battery :	CR123A (2Battery) Micro USB for Emergency.
Battery Life :	12 Months Battery Life.
Working Temperature :	-25° ~ 60°
Working Humidity :	20% ~ 90%
Door Thickness :	35 ~ 60mm.
Material :	Aluminium Alloy
Test Cycle :	2,50,000 Cycle Tested, 200 hours Salt Spray Tested
Lock Dimension :	56mm x 39mm
Finish option :	Matt Black



Fingerprint



Mobile App



RFID Key



Keypad



Mechanical Key

The perfect solution for narrow doors, offering advanced security features without compromising on space. Designed to fit seamlessly into narrow door frames, this series combines convenience and protection in one sleek package. With Bluetooth ekey, WiFi connectivity (additional gateway/hub required), fingerprint recognition, pin codes, non-hackable cards, and a mechanical key, you can enjoy comprehensive security options tailored to your needs. Whether you're looking to upgrade your home or office security, the Digital Lock provides peace of mind with its robust features and effortless integration. Say goodbye to narrow door woes and hello to enhanced security with EuroArt EA250 Leverline.



Features:

- Fingerprint : Capacitive Fingerprint (Up to 200 unique accesses)
- Key-pad or password : 1 Master access, up to 149 unique user password.
- RFID Card : Up to 100 unique accesses.
- Manual Key : 2 Keys in the set.
- User access : Admin, User & Guest.
- Bluetooth Key : Bluetooth app access.
- WiFi : Optional with wireless gateway (Not included in standard package)
- Locking mode : Auto locking, privacy locking manual locking, Defence locking
- Application : Residential, Office, Airbnb, Condo, Apartment Projects.
- Operations : Panic exit, Non handed operation adult trails (with mobile app)



Specification:

Battery :	AA+(4Battery) Micro USB for Emergency.
Battery Life :	12 Months Battery Life.
Working Temperature :	-25° ~ 60°
Working Humidity :	0% ~ 90%
Door Thickness :	35 ~ 65mm.
Material :	Aluminum Alloy
Test Cycle :	2,50,000 Cycle Tested, 200 Hours Salt Spray Tested
Lock Dimension :	65mm(H) 150mm(W)
Finish option :	Black, Silver Grey





Fingerprint



Mobile App



RFID Key



Keypad



WIFI Access

The EA 130 Smart Lock, where state-of-the-art technology converges with sophisticated design. Despite its compact dimensions, this robust device is packed with sophisticated functionalities such as an integrated camera, peer-to-peer intercom, and screen options, offering a full-fledged security system without any compromise.



Features:

- Fingerprint : Capacitive Fingerprint (Up to 200 unique accesses)
- Key-pad or password : 1 Master access, up to 149 unique user password.
- RFID Card : Up to 100 unique accesses.
- Manual Key : 2 Keys in the set.
- User access : Admin, User & Guest.
- Bluetooth Key : Bluetooth app access.
- WiFi : Optional with wireless gateway (Not included in standard package)
- Locking mode : Auto locking, privacy locking manual locking, Defence locking
- Application : Residential, Office, Airbnb, Condo, Apartment Projects.
- Operations : Panic exit, Non handed operation adult trails (with mobile app)




SILVER GREY



BLACK

Specification:

Battery :	(Rechargeable Lithium Battery, Micro USB for Emergency.
Battery Life :	10 months Battery Life.
Working Temperature :	-25° ~ 60°
Working Humidity :	0% ~ 95%
Door Thickness :	35 ~ 65mm.
Material :	Aluminium Alloy
Lock Dimension :	300mm(H) 67mm(W)* 22mm(T).
Finish option :	Matt Black, Satin Stainless Steel

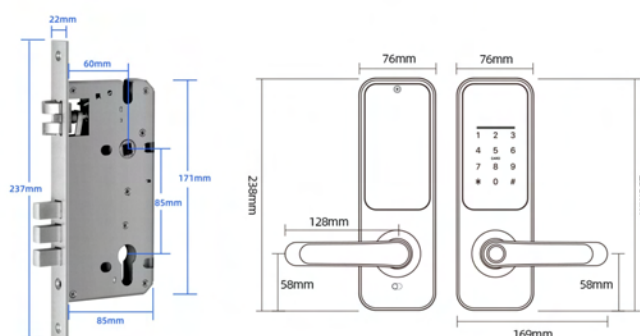

NOTES



Euro Art UK Ltd.

Unit K1, Glenfield Business Park Philips Road
Blackburn, United Kingdom, BB1 5PF

Landline. 01254 433883

Mobile No. 0044 7875651180

www.euro-art.co.uk

www.euroartuk.com

info@euroartuk.com